





TM Series Go #FastandFlawless

TM-5340/TM-5350/
TM-5355 (With Hard Drive)



TM-5240/TM-5250/
TM-5255 (With Hard Drive)



Think Fast, Print Flawless


New Magenta Ink

For vivid, enhanced, life-like and remarkably RED prints. The improved ink capabilities helps to bring out greater color expressions within prints.



Enhanced L-COA II High Speed Processing Chip

For high printing speed of 3.2 pages/min (A1) and swift startups from sleep mode as well as continuous printing.

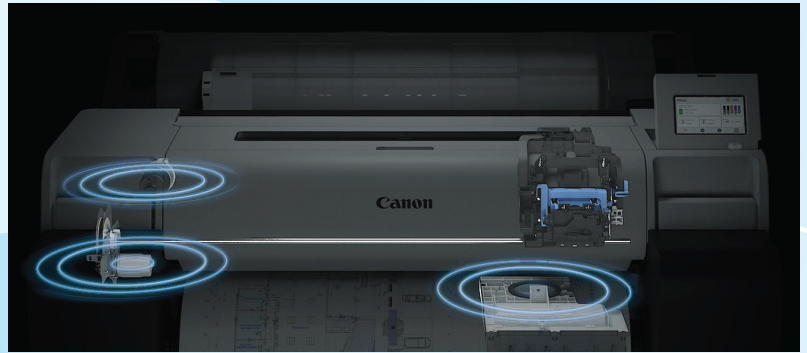

Multi-Functional Printers

Enhanced scanning and copying capabilities. The printers can be used alongside a scanner that features new functions, such as a maximum paper thickness of 0.8mm alongside brand new transparent guides.



Faster FPOT

Print immediately when needed with almost no warm-up time and quicker turnaround times from sleep mode.



Smart Media Handling

Automatic media type and width detection along with estimation of remaining media. Roll paper balance and paper media details can also be easily retrieved from the printer.



Fully Front-Accessible Operations

All printing operations can be performed from the front.

For Less Hassle, More Productivity

Swift and Productive Prints

The L-COA PRO II chip speeds data processing making it 30% faster than its predecessors with a speed of 3.2 pages/min (A1).



Flat Top Space & Fully Accessible

Flat top design helps in easy roll replacement or checking printing samples. Fully front accessible design allows the user to operate the machine from front without getting into the hassle of moving the machine.

Smart Media Handling

Now easily detect the type, width and estimated length of the media with our smart media handling feature which is designed for convenience.



Direct Print Plus

Print **PDF** or **JPEG** files in batches effortlessly with custom templates by using Direct Print Plus.



Seamless Connectivity

The printer can be connected via WiFi, USB and LAN.



For Prints as Vibrant as Your Imagination



Borderless Brilliance

Borderless poster printing on any size of roll paper is now possible.




New magenta ink

For vivid, enhanced, life-like and remarkably RED prints.

Hot Swap


Even if the ink tanks run out of ink, the printer continues to print using the ink available as reserve in sub-ink tanks. This allows the replacement of empty cartridges while printing is live.

Main Ink Tanks

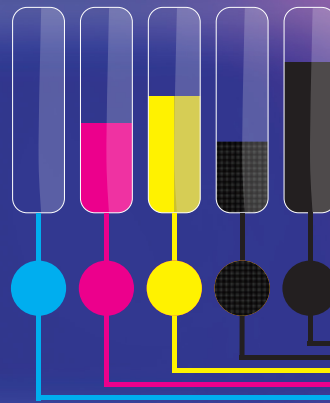

Sub Ink Tanks

Ink Box

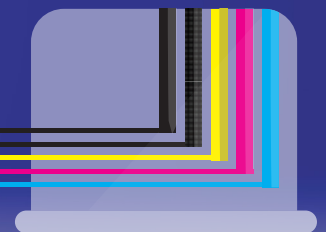

5-Color Pigment Ink

A spectrum of perfection at your fingertips, with our 5-color pigment ink delivering exceptional quality.



PosterArtist

The PosterArtist application offers effortless creation of vibrant and visually appealing posters.



Check it out at <https://posterartist.canon>

Efficiency Meets Eco-Friendliness



Scanning with Efficiency

The TM-5350 with the Lm36 scanner supports up to 0.8mm paper thickness and has new transparent guides; the TM-5355 with the Z36 scanner provides a web manual for troubleshooting and displays the remaining amount of roll paper.



Copying at Your Fingertips

Convenience is key, and our copying capabilities put control directly in your hands.




Lower Power Consumption


Embrace sustainability with an energy efficient design that uses 30% less power without compromising performance.



imagePROGRAF TM-5240 imagePROGRAF TM-5250

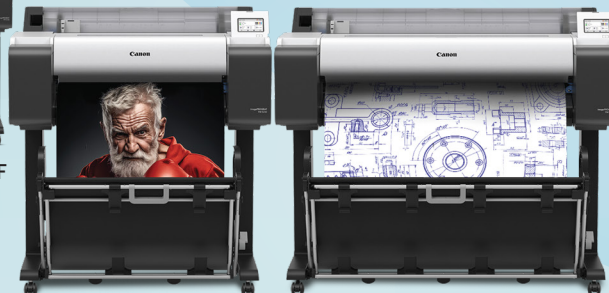

imagePROGRAF TM-5255 imagePROGRAF TM-5355

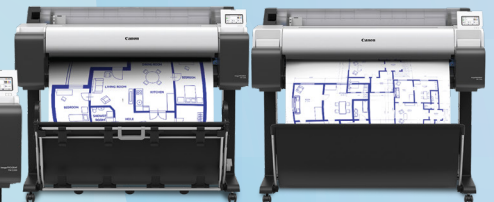

imagePROGRAF TM-5350 imagePROGRAF TM-5340

SPECIFICATIONS

PRINTER		TM-5240	TM-5250	TM-5255	TM-5340	TM-5350	TM-5355
Printer Type		5-Colour, 609.6 mm (24 in)			5-Colour, 914.4 mm (36 in)		
Number of Nozzles		15 360 nozzles (MBK 5,120 nozzles, Other Colours 2 560 nozzles each)					
Max. Print Resolution		2,400 x 1,200 dpi					
Nozzle Pitch		1,200 dpi x 2					
Line Accuracy¹		± 0.1 % or less					
Ink Tank Size	Sales Ink	55 ml (MBK, BK, C, M, Y)	130 ml / 300 ml (MBK, BK, C, M, Y)		55 ml (MBK, BK, C, M, Y)	130 ml / 300 ml (MBK, BK, C, M, Y)	
	Bundle Starter Ink	55 ml (MBK, BK, C, M, Y)	130 ml (MBK) / 90 ml (BK, C, M, Y)		55 ml (MBK, BK, C, M, Y)	130 ml (MBK) / 90 ml (BK, C, M, Y)	
Ink Type		Pigment Ink					
Print Languages		SG Raster (Swift Graphic Raster) HP-GL/2, HP RTL JPEG (Ver. JFIF1.02) CALS G4 ²					
		N/A	N/A	PDF	N/A	N/A	PDF
Print Solutions & Applications		Printer Driver (Win/Mac versions), Direct Print Plus, Free Layout PLUS, PosterArtist Windows Web & Lite, Wi-Fi Connection Assistant, PIXMA Cloud Link, Apple AirPrint (Mobile), Canon PRINT Inkjet/SELPHY (Mobile), Canon Print System (Mobile), uniFlow server					
Management Solutions		Media Configuration Tool (includes Color Customisation Tool), Accounting Manager, Device Management Console, Quick Utility Toolbox					
Interface (Built-In)	USB B Port	Hi-Speed USB, Full Speed (12 Mbit/s), Hi-Speed (480 Mbit/s), Bulk Transfer, Series B (4 pins)					
	USB A Port	N/A	N/A	USB Memory (Direct Print) Supported file format: JPEG/PDF	N/A	N/A	USB Memory (Direct Print) Supported file format: JPEG/PDF
	Network	IEEE 802.3 10base-T IEEE 802.3u 100base-TX IEEE 802.3ab 1000base-T IEEE 802.3x Full Duplex SNMP, HTTP, TCP/IP (IPv4/IPv6), FTP					
	Wireless LAN	IEEE802.11 b/g/n WPA-PSK (TKIP/AES) WPA2-PSK (TKIP/AES) WPA3-SAE (AES) WPA-EAP (AES) ³ WPA2-EAP (AES) ³ WPA3-EAP (AES) ³					
Memory Hard Disk	2 GB No Hard Disk	2 GB No Hard Disk	128 GB (Physical Memory 2 GB) 500 GB (Encrypted) Hard disk	2 GB No Hard Disk	2 GB No Hard Disk	128 GB (Physical Memory 2 GB) 500 GB (Encrypted) Hard Disk	
Display	LCD (109.22 mm (4.3 in)/10.9 cm TFT color)						
OS Compatibility	Please visit https://asia.canon.com to confirm OS compatibility and to download the latest drivers.		Windows, Macintosh				

SCANNER		TM-5240	TM-5250	TM-5255	TM-5340	TM-5350	TM-5355
Scanner Model		Lm24			Lm36		Z36
Scan Width		609.6 mm (24 in)			914.4 mm (36 in)		
Optical Resolution (DPI)		Up to 600 dpi			Up to 600 dpi		Up to 1 200 dpi
Scan Format		TIFF, TIFF G4, PDF, PDF/A, JPEG Multipage PDF & JPEG			TIFF, TIFF G4, PDF, PDF/A, JPEG Multipage PDF & JPEG		TIFF, TIFF G4, PDF, PDF/A, JPEG, DWF Multipage PDF/PDF/A, TIFF/JPEG
Scan Destinations		Scan to PC, USB			Scan to PC, USB		Scan to PC, Shared Folders, USB, FTP, Email, Cloud (Dropbox)
Scanner Software		ScanAPP			ScanAPP		SmartWorks (includes system controller)
Max. Copy Speed: (inch/sec) or (mm/sec)	Colour Draft (300/300 dpi): 25.4 mm/s (1 ips) Standard (300/600 dpi): 25.4 mm/s (1 ips) Best (600/600 dpi): 12.7 mm/s (0.5 ips)	Colour Draft (300/300 dpi): 25.4 mm/s (1 ips) Standard (300/600 dpi): 25.4 mm/s (1 ips) Best (600/600 dpi): 12.7 mm/s (0.5 ips)			Colour Draft (300/300 dpi): 25.4 mm/s (1 ips) Standard (300/600 dpi): 25.4 mm/s (1 ips) Best (600/600 dpi): 12.7 mm/s (0.5 ips)	Colour (24 bit) 200 dpi: 152.4 mm/s (6 ips) 300 dpi: 101.6 mm/s (4 ips) 600 dpi: 50.8 mm/s (2 ips)	
	Monochrome Draft (300/300 dpi): 76.2 mm/s (3 ips) Standard (300/600 dpi): 76.2 mm/s (3 ips) Best (600/600 dpi): 38.1 mm/s (1.5 ips)	Monochrome Draft (300/300 dpi): 76.2 mm/s (3 ips) Standard (300/600 dpi): 76.2 mm/s (3 ips) Best (600/600 dpi): 38.1 mm/s (1.5 ips)	N/A		Monochrome Draft (300/300 dpi): 76.2 mm/s (3 ips) Standard (300/600 dpi): 76.2 mm/s (3 ips) Best (600/600 dpi): 38.1 mm/s (1.5 ips)	Monochrome / Greyscale (8 bit) 200 dpi: 330.2 mm/s (13 ips) 300 dpi: 218.4 mm/s (8.6 ips) 600 dpi: 109.2 mm/s (4.3 ips)	
Max. Scan Speed: (inch/sec) or (mm/sec)	Colour Draft (200 dpi): 25.4 mm/s (1 ips) Standard (300 dpi): 12.7 mm/s (0.5 ips) Best (600 dpi): 8.38 mm/s (0.33 ips)	Colour Draft (200 dpi): 25.4 mm/s (1 ips) Standard (300 dpi): 12.7 mm/s (0.5 ips) Best (600 dpi): 8.38 mm/s (0.33 ips)			Colour Draft (200 dpi): 25.4 mm/s (1 ips) Standard (300 dpi): 12.7 mm/s (0.5 ips) Best (600 dpi): 8.38 mm/s (0.33 ips)	Colour (24 bit) 200 dpi: 76.2 mm/s (3 ips) 300 dpi: 50.8 mm/s (2 ips) 600 dpi: 50.8 mm/s (2 ips)	
	Monochrome Draft (200 dpi): 76.2 mm/s (3 ips) Standard (300 dpi): 38.1 mm/s (1.5 ips) Best (600 dpi): 25.4 mm/s (1 ips)	Monochrome Draft (200 dpi): 76.2 mm/s (3 ips) Standard (300 dpi): 38.1 mm/s (1.5 ips) Best (600 dpi): 25.4 mm/s (1 ips)			Monochrome Draft (200 dpi): 76.2 mm/s (3 ips) Standard (300 dpi): 38.1 mm/s (1.5 ips) Best (600 dpi): 25.4 mm/s (1 ips)	Monochrome / Greyscale (8 bit) 2200 dpi: 330.2 mm/s (13 ips) 300 dpi: 218.4 mm/s (8.6 ips) 600 dpi: 109.2 mm/s (4.3 ips)	
Maximum Original Thickness & Length		Up to 0.8 mm			Up to 0.8 mm		Up to 1 mm

PRINT SPEED ^{1*}		TM-5250	TM-5255
Plain Paper	CAD Drawing (A1 Portrait, Fast Q5 mode)	20 s	
Heavyweight Coated Paper	Poster (A1 Portrait, Standard mode)	1 min 23 s	

PRINT SPEED ^{1*}		TM-5240	TM-5340
Plain Paper	CAD Drawing (Fast Q5 mode)	A1 Size 23 s	A0 Size 41 s
Heavyweight Coated Paper	Poster (Standard mode)	A1 Size 1 min 45 s	A0 Size 3 min 10 s

PRINT SPEED ^{1*} (A1 SIZE)		TM-5350	TM-5355
Plain Paper	CAD Drawing (A1 Portrait, Fast Q5 mode)	17 s	
	CAD Drawing (A0 Portrait, Fast Q5 mode)	32 s	
Heavyweight Coated Paper	Poster (A0 Portrait, Standard mode)	2 min 33 s	

SPECIFICATIONS

DIMENSIONS (WxDxH) & WEIGHT*		TM-5250	TM-5255	DIMENSIONS (WxDxH) & WEIGHT*		TM-5240	TM-5340
Packaged Dimensions & Weight	Printer (Main unit + Pallet)	1152 x 913 x 679 mm Weight: 73 kg		Packaged Dimensions & Weight	TM-5240 Printer (Main unit with pallet)	1147 x 874 x 542 mm Weight: 50 kg	
	Stand + Basket (SD-26)	1058 x 826 x 270 mm Weight: 22 kg			TM-5240 Stand + Basket (SD-24)	1058 x 826 x 270 mm Weight: 20 kg	
	Printer (Main unit with stand and pallet) (SD-26)	1152 x 913 x 946 mm Weight: 96 kg			TM-5340 Stand + Basket (SD-33)	1152 x 912 x 679 mm Weight: 71 kg	
Printer & Weight	Printer	978 x 748 x 439 mm (Operation panel is not tilt up) Weight: 41.5 kg (excluding print head and ink)		Printer & Weight	Printer	978 x 748 x 439 mm Weight: 40 kg	
	Printer with Stand + Basket (SD-26)	978 x 885 x 1060 mm (Basket Opened) 982 x 756 x 1060 mm (Basket Closed) Weight: 54.5 kg (excluding print head and ink)			TM-5240 Printer with Stand + Basket (SD-24)	978 x 868 x 1,060 mm (Basket Opened) 978 x 756 x 1060 mm (Basket Closed) Weight: 50.9 kg	
Scanner & Weight		935 x 253 x 131 mm Weight: 5.28 kg	N/A		TM-5340 Printer with Stand + Basket (SD-33)	978 x 756 x 1060 mm (Basket Closed) Weight: 59.2 kg	
Scanner & Weight				Scanner & Weight		935 x 253 x 131 mm Weight: 5.28 kg	1285 x 748 x 439 mm Weight: 47.5 kg 1285 x 868 x 1,060 mm (Basket Opened) 1285 x 756 x 1060 mm (Basket Closed) Weight: 59.2 kg 1238 x 253 x 131 mm Weight: 6.56 kg

DIMENSIONS (WxDxH) & WEIGHT*		TM-5350	TM-5355
Packaged Dimensions & Weight	Printer (Main unit + Stand + Basket + Pallet) (SD-35)	1462 x 1122 x 801 mm Weight: 113 kg	
Printer & Weight	Printer	1285 x 748 x 439 mm (Operation panel not tilted up) Weight: 49.5 kg (Excluding print head and ink)	
	Printer with Stand + Basket (SD-35)	1285 x 885 x 1060 mm (Operation panel not tilted up / Basket opened) 1285 x 756 x 1060 mm (Operation panel not tilted up / Basket closed) Weight: 63.8kg (Excluding print head and ink)	
Scanner & Weight		1238 x 253 x 131 mm Weight: 6.56 kg	1056 x 251 x 156 mm Weight: 7.8 kg System Controller Weight: 2.5 kg

MEDIA HANDLING		TM-5240	TM-5250	TM-5255	TM-5340	TM-5350	TM-5355
Media Width	Roll Paper	203.2 - 610 mm			203.2 - 917 mm		
	Cut Sheet						
Media Thickness	Roll Paper/Cut Sheet	0.07 - 0.8 mm					
	Roll Paper	203.2 mm - 18 m ²					
Printable Media Length	Roll Paper	279.4 - 1600 mm					
	Cut Sheet						
Media Core Size		50.8 mm (2 in) (Default) / 76.2 mm (3 in) core (Optional)	50.8 mm (2 in) / 76.2 mm (3 in) core	50.8 mm (2 in) (Default) / 76.2 mm (3 in) core (Optional)	50.8 mm (2 in) / 76.2 mm (3 in) core		
Outside Diameter Roll Paper		150 mm or less					
Media Feed	Roll Paper	1 Roll, Top Load, Front Output					
	Cut Sheet	Front Load, Front Output					
Delivery Direction		Face-up, Front side					
Margins (Top, Bottom, Side)	Recommended Area (Roll Paper)	20 mm, 3 mm, 3 mm					
	Recommended Area (Cut Sheet)	20 mm, 20 mm, 3 mm					
	Printable Area (Roll Paper)	3 mm, 3 mm, 3 mm					
	Printable Area (Roll Paper Borderless Print)	0 mm					
	Printable Area (Cut Sheet)	3 mm, 20 mm, 3 mm					

POWER AND OPERATING REQUIREMENTS		TM-5240	TM-5250	TM-5255	TM-5340	TM-5350	TM-5355
Power Supply (Printer)		AC 100-240 V (50-60 Hz)					
Power Consumption (Printer)	Print Operation	Operation: < 59 W	Operation: < 62 W	Operation: < 64 W	Operation: < 65 W	< 65 W	< 69 W
	Sleep Mode	<1.6 W					
	Power OFF	< 0.1 W					
Recommended Environment	Temperature	Temperature: 15 - 30 °C					
	Humidity	10 - 80 % RH (no dew condensation)					
Acoustic	Power ⁷	Approx. 6.0 Bels	Approx. 6.2 Bels	Approx. 6.0 Bels	Approx. 6.0 Bels	Approx. 6.2 Bels	
	Pressure ⁷	Approx. 39 dB(A), Standby 35 dB(A) or less	Approx. 41 dB(A), Standby 35 dB(A) or less		Approx. 39 dB(A), Standby 35 dB(A) or less	Approx. 41 dB(A), Standby 35 dB(A) or less	
OPTIONAL ACCESSORIES		TM-5240	TM-5250	TM-5255	TM-5340	TM-5350	TM-5355
Roll Unit		-					
2/3" Roll Holder		RH2-28				RH2-35	
Printer Stand + Basket		SD-24	SD-26			-	
Card Reader Interface for uniFLOW		RA-02					
CONSUMABLES		TM-5240	TM-5250	TM-5255	TM-5340	TM-5350	TM-5355
Ink Tank		Magenta: PFI-8031 (55 ml) Matte Black / Black / Cyan / Yellow: PFI-8030 (55 ml)	Magenta: PFI-8121 (130 ml) / PFI-8321 (300 ml) Matte Black / Black / Cyan / Yellow: PFI-8120 (130 ml) / PFI-8320 (300 ml)		Magenta: PFI-8031 (55 ml) Matte Black / Black / Cyan / Yellow: PFI-8030 (55 ml)	Magenta: PFI-8121 (130 ml) / PFI-8321 (300 ml) Matte Black / Black / Cyan / Yellow: PFI-8120 (130 ml) / PFI-8320 (300 ml)	
Print Head		PF-06					
Cutter Blade		CT-08					
Maintenance Cartridge		MC-31					

Specifications are subject to change without notice.

*1 User adjustments required. Printing environment and media must match those used for the adjustments. Paper required: Plain paper and coated paper only.

*2 USB Thumb drive printing is not supported.

*3 IEEE802.1X (EAP-TLS/EAP-TTLS/PEAP) Supported.

*4 Time taken to print one page does not include time required for data processing, data transfer and pre-printing operations.

*5 Varies according to the OS and application.

*6 Include roll holder set.

*7 Acoustic Power and Pressure are measured using ISO 7779 standard.




CANON INDIA PVT. LTD.

7th Floor, Tower B, Building #5, DLF Epitome Building, DLF Phase III, Gurugram-122002
 Ph.: 0124-4160000 | Fax: 0124-4160011 | Web: in.canon

Part Code: 9700W244

<p>DEALER'S STAMP</p>	<p>This document is for information purposes only. The contents are subject to change without notice. Product options, name and availability may vary by regions. We expressly disclaim any liability or contractual obligations with respect to this document. Brands and product names are trademarks and/or registered trademarks of their respective owners.</p>
------------------------------	--

© Canon India Pvt. Ltd. 2023. All rights reserved.

 Canon India Complies with E-Waste (Management) Rules, 2016

Please return end-of-life product for environmentally safe disposal. For details visit www.canon.co.in/recycle
 This document is for information purpose only. The contents are subject to change without notice. Product options, name and availability may vary by regions. We expressly disclaim any liability or contractual obligations with respect to this document. Brands and products names are trademarks and/or registered trademarks of their respective owners.

Warnings: Unauthorized recording of copyrighted materials may infringe on the rights of copyright owners and be contrary to copyright laws.

E-Waste Rules:

Canon India complies with the E-Waste (Management) Rules, 2022 and its amendments. This product is in accordance with the rule 16 pertaining to the Reduction in the use of hazardous substances (ROHS).

Once this product reaches to end of life, this product should not be disposed of with your regular household waste.

For more information, please visit: <https://in.canon/en/consumer/web/e-waste> or write to us at cipl.e-waste@canon.co.in

