

EOS
DIGITAL

Canon
Delighting You Always

MASTERS, MEET THE MASTER.

The New **EOS-1D^X** Mark III is here.

To redefine the benchmark in photography and videography.



— 10-bit HEIF | Dual CF Express | Square Pixel AF Sensor —

20
Frames Per Sec
Continuous Shooting
LiveView Mode

5.5K
RAW
@ 60 Frames
Per Sec

191-Point
155 Cross-type
Points **AF**

DiG!C
X

ISO
102400
Standard

FULL HD
@ 120 Frames
Per Sec

Dual Pixel **AF**
CMOS

BE THE EXCEPTIONAL GAME CHANGER

Notably distinguished as the epitome of full-frame DSLR cameras for professionals, the Canon EOS-1D series creates a brand-new masterpiece in its finest, class-leading flagship to date. A sturdy and reliable workhorse crafted to perfection for swift response and intuitive focusing, the Canon EOS-1D X Mark III offers superior image quality as well as breathtaking 4K video recording made for the most challenging subjects.

FAST
POWERFUL
RELIABLE



EOS-1D X
Mark III




The EOS-1D X Mark III achieves precise focusing with up to 191 AF points and effortlessly captures decisive moments with up to 20 fps in Live View mode for more than 1000 shots* (RAW + JPEG) in a single burst. Advanced face tracking and eye detection, even in environment as dark as EV-6^Δ, give photographers a huge edge in capturing raw emotion in their story.

Featuring for the first time in EOS history, HDR PQ HEIF 10-bit file recording ensures superb image quality. Top that with a new low-pass filter and clarity compensation, the EOS-1D X Mark III easily meets the highest demands of professionals in the field, from sports journalists to wildlife and commercial photographers.

FUEL THE THIRST FOR SPEED

AF TRACKING PRECISION

In viewfinder shooting mode, the EOS-1D X Mark III features the latest AF sensor that supports up to 191 AF points* (up to 155 cross-type AF points*). This allows the EOS-1D X Mark III to maintain focus even in low-contrast and dimly lit shooting conditions up to EV-6[^] where conventional AF systems struggle to grasp. The immense improvement in the AI Servo AF algorithm aids in face and head detection for high-precision subject tracking performance during sporting events that involve dynamic movements.

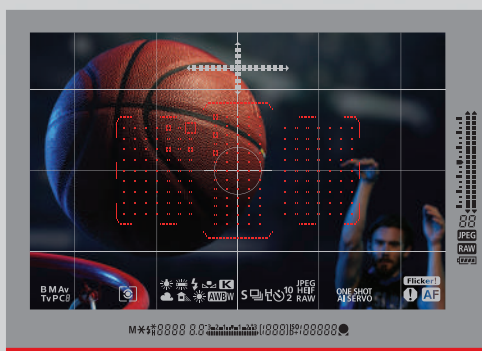

* Number of available AF points and cross-type points may vary depending on lens used.

[^] In Live View Mode (f/1.2, center AF point, room temperature, ISO 100, One-Shot AF). EV-4 via optical viewfinder (center AF point supporting f/2.8, One-Shot AF, room temperature, ISO 100)

HIGH-SPEED CONTINUOUS SHOOTING

The swift speed of burst shooting enables a higher chance for professional photographers to capture that precise moment when the composition is perfect. The EOS-1D X Mark III fires at an impressive shooting speed of up to 16 fps using the viewfinder, in sync with the newly developed AF/AE system for rapid response on precision autofocus and exposure control in every decisive shot. To fully capitalise on the high frame rate, the EOS-1D X Mark III is equipped with dual slots for the next-generation CFexpress[†] cards. Capable of high-speed data transfer for 5.5K RAW movies at up to 2600 Mbps, these cards greatly increase the number of shots in a single burst to 1000 shots or more* (JPEG, RAW or RAW + JPEG)

* Based on a 325GB CFexpress card (Canon Test Standards) and shooting through the viewfinder.

[†] Canon is an authorized licensee of the CFexpress2.0™ trademark owned by CompactFlash Association, which may be registered in various jurisdictions.

Up to
16
Frames
Per Sec

Dual Card Slots



LIVE VIEW SHOOTING

The EOS-1D X Mark III captures at up to 20 fps with AF/AE tracking. With a broad AF area divided into 525 segments, precise focusing with the Dual Pixel CMOS AF can be achieved throughout almost the entire frame. 3869 AF positions can be manually selected if fine-tuning of AF is required. Electronic shutter is also available for silent shooting.

Dual Pixel
CMOS AF



Eye Detection
AF

Up to
20
Frames Per Sec
LiveView Mode

SEIZE BEAUTY IN MOTION

4K MOVIE SHOOTING


The EOS-1D X Mark III supports the cinematic aspect ratio standard of 4K 60p UHD/DCI, utilizing the full width of the camera's 35mm full-frame CMOS sensor for immersive wide-angle shooting in outstanding quality. The camera is also capable of capturing 5.5K RAW movies* while simultaneously recording Canon Log (MP4)** to support development work on movie production. Proven in the Cinema EOS System, the 4:2:2 10-bit Canon Log profile provides users with up to 12 stops of dynamic range, offering rich details with a high degree of freedom in grading. The EOS-1D X Mark III also features a HDMI terminal for seamless 4K data transmission to another display device or an external recorder. Videographers can also achieve slow-motion effects with high-speed movie shooting at 120p/100p in FHD format to dramatise fast-moving subjects such as in sporting events. Be it for filmmaking, commercial video or news reporting, the EOS-1D X Mark III empowers you with top-end image quality and operational flexibility to capture all the raw action in motion at the front line.

4K
60p

4K
Frame Grab

120p
High Frame Rate
HD Movie

HDMI

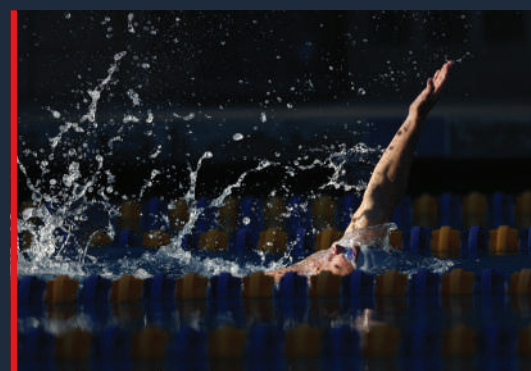

* AF does not function with 5.5K RAW 60p/50p (NTSC/PAL).

** Two memory cards are required when recording RAW and Canon Log (MP4) data files simultaneously

ENGINEERING THE IMPOSSIBLE

NEW CMOS SENSOR & DIGIC X


Image resolution and edge sharpness have never been more precise with the EOS-1D X Mark III's pursuit for image quality excellence. The EOS-1D X Mark III is powered by the latest DIGIC X imaging processor, boosting performance in all aspects – from resolution to colour reproduction to noise reduction – far beyond those employed in its predecessors. With default ISO speed of up to 102400 (expandable to 50, 204800, 409600 & 819200), the camera is capable of advanced noise reduction, delivering clean and well-defined images even in low-light situations. Combining the DIGIC X imaging processor with an impeccable 20.1-megapixel full-frame CMOS sensor, the camera surpasses every expectation in both high-calibre photo capture as well as pristine 5.5K RAW movie recording.



20.1 MEGA
PIXELS
CMOS



ISO
102400
FHD 25600
4K 25600

FULL
FRAME
CMOS

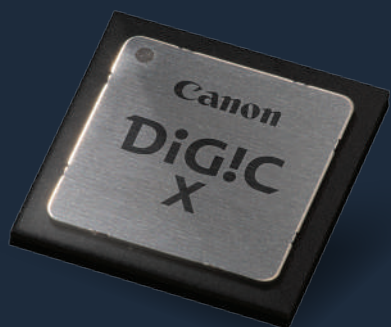



HDR PQ HEIF 10-BIT RECORDING

The EOS-1D X Mark III is the first EOS DSLR to process image data and record HEIF 10-bit files with HDR PQ, a new gamma curve to maximise dynamic range. This means complex colour and brightness gradations are reproduced with realism. HDR images (HEIF) are converted to standard dynamic range images automatically when viewed on a non-HDR compatible display.

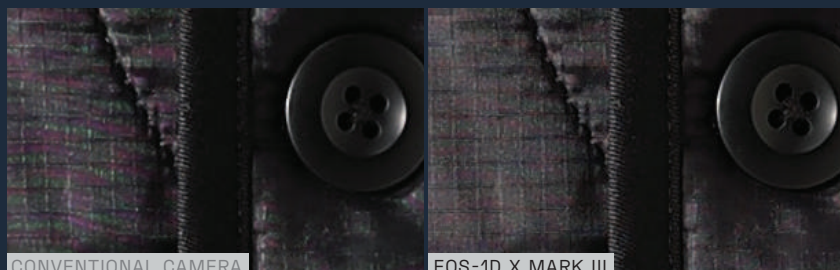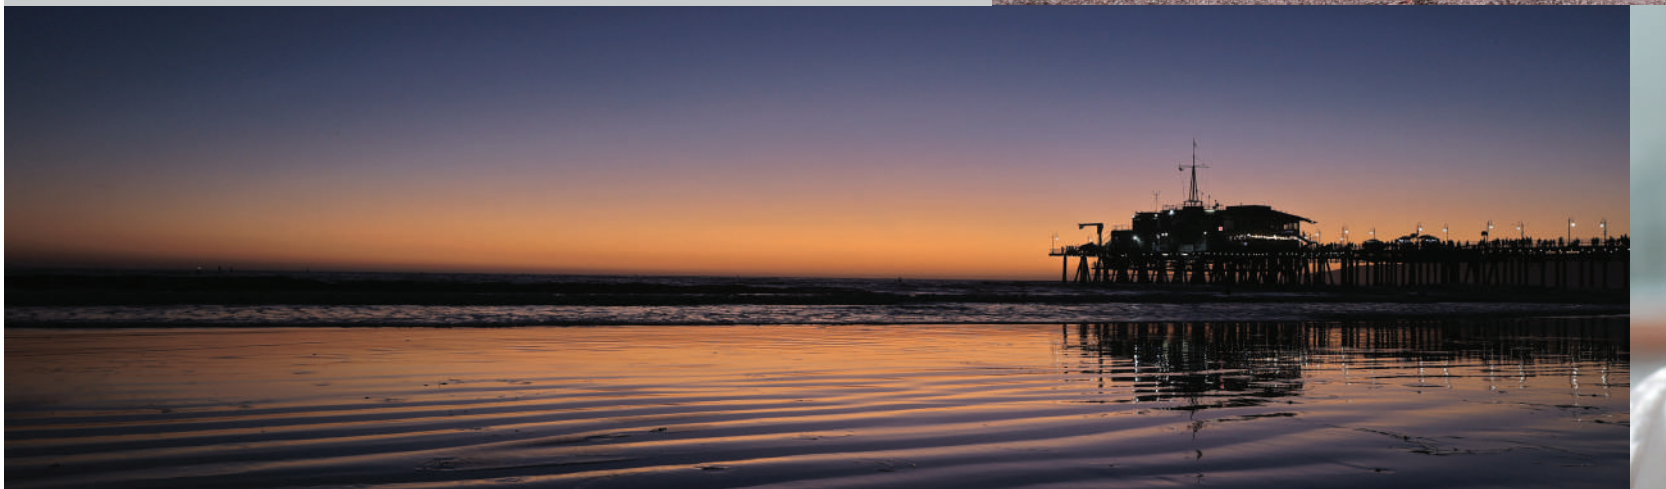

HIGH DETAIL LOW-PASS FILTER

A new 16-point separation low-pass filter developed for the EOS-1D X Mark III significantly enhances resolution while reducing false colours and moiré effect. This is much more effective than conventional low-pass filters.

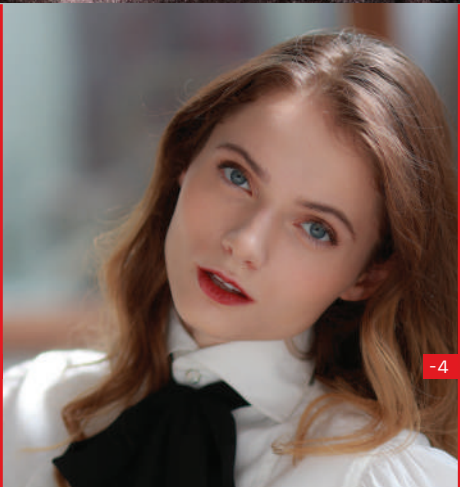
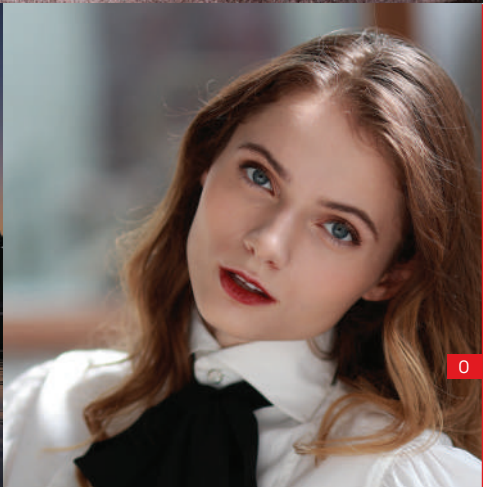


CLARITY

The EOS-1D X Mark III features “Clarity” as a new image quality adjustment function for adjusting edge contrast. Unlike the existing “Contrast” of Picture Style, this function enables adjustment of contrast (sharpness) around edges while suppressing the loss of detail in highlights and shadows in the overall image. This allows users to increase clarity (+) to enhance a sense of sharpness in low-contrast images, or reduce clarity (-) to maintain a soft appearance on a subject’s skin.

BUILT-IN DIGITAL LENS OPTIMIZER

The EOS-1D X Mark III’s built-in Digital Lens Optimizer soundly corrects diffraction blur and optical aberrations based on the design values of compatible lenses to avoid compromising depth-of-field control and image quality degradation, allowing you to obtain top-notch quality images even without post-processing. The EOS-1D X Mark III also features an in-camera RAW image development with a stronger Digital Lens optimizer effect when needed.





EF600mm f/4L IS III USM +2x III
1/250 sec
Aperture f/8
ISO 40000



EF600mm f/4L IS III USM
1/800 sec
Aperture f/4
ISO 12800

EOS-1D^{XL} Mark III

EF24-70mm f/2.8L II USM
1/500 sec
Aperture f/11
ISO 400



EF85mm f/1.4L IS USM
1/400 sec
Aperture f/1.6
ISO 100



EF600mm f/4L IS III USM
1/1250 sec
Aperture f/4
ISO 400



MOVE BEYOND INTUITION

ADVANCED CONTROLS

An innovative addition to the new EOS-1D X Mark III is a customisable smart controller that allows for swift and easy selection of your desired AF point by dragging your finger over the AF-ON button. Touch sensitivity of the button can be adjusted to change the speed of AF point movement according to your shooting needs. Additionally, intelligent design through a combination of well-placed dials, customisable multi-controllers and a fully touchscreen interface place even greater control in your hands to capture your prized shot.



MADE FOR THE OUTDOORS


The EOS-1D X Mark III features a touchscreen LCD with approximately 21,00,000 dots that ensure ample resolution for magnifying images, while the anti-reflective and scratch-resistant screen allow for easy preview of images even when outdoors. Viewfinder shooting is also comfortable with an approximately 20mm eye point for those wearing glasses, while key elements in the viewfinder are displayed in red for easy viewing in both day and night. When working in the dark, frequently-used buttons will be illuminated for easier navigation.



BUILT FOR SOLIDITY

DURABILITY OF APPROX. 500,000 CYCLES

Designed to ensure mechanical strength for high-speed continuous shooting and smooth operations, the EOS-1D X Mark III is outfitted with a shutter mechanism durability of approximately 500,000 cycles. This is a notch above the EOS-1D X Mark II with a substantial increase in the number of shots, prolonging the longevity of camera performance.



DUST-AND-DRIP RESISTANT STRUCTURE

For professionals out on the front line, the EOS-1D X Mark III is the hardy and reliable camera needed to withstand unpredictable weather and terrain. Built with a sturdy magnesium alloy body complete with dust-and-moisture resistance around critical areas, the EOS-1D X Mark III's robust camera system is ready to tough it out so you can travel worry-free on every assignment.

NETWORK COMPATIBLE


Sharing is a vital function for professional photographers to transfer, display, and post their images online. This includes establishing a stable network connection that operates without a hitch with the comfort of data security. The EOS-1D X Mark III comes with a network tab that makes it effortless for configuring the camera's built-in Wi-Fi (with FTP), wired LAN module, built-in GPS receiver for geotagging photos, and enduring security standards all under a sophisticated user interface. Professional users can depend upon the stability and operability in the EOS-1D X Mark III's enhanced Wi-Fi capabilities and Bluetooth Low Energy technology are deemed unrivalled amongst the EOS-1D series.




NOMENCLATURE




VIEWFINDER INFORMATION

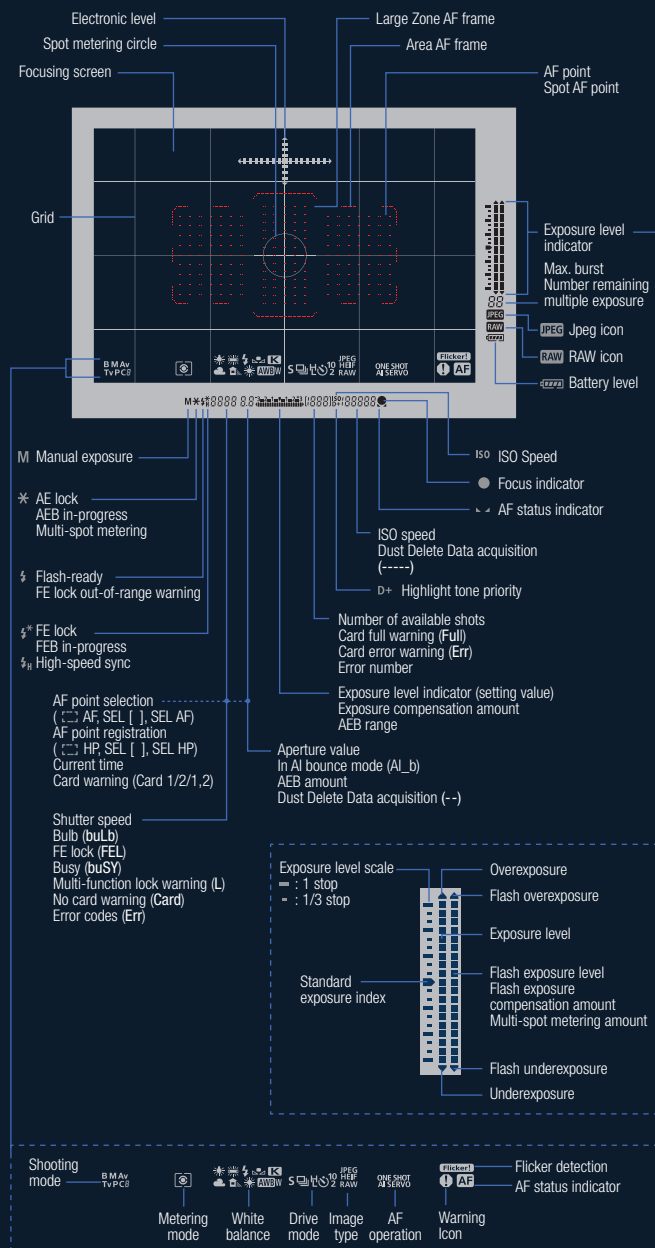

TOP LCD PANEL

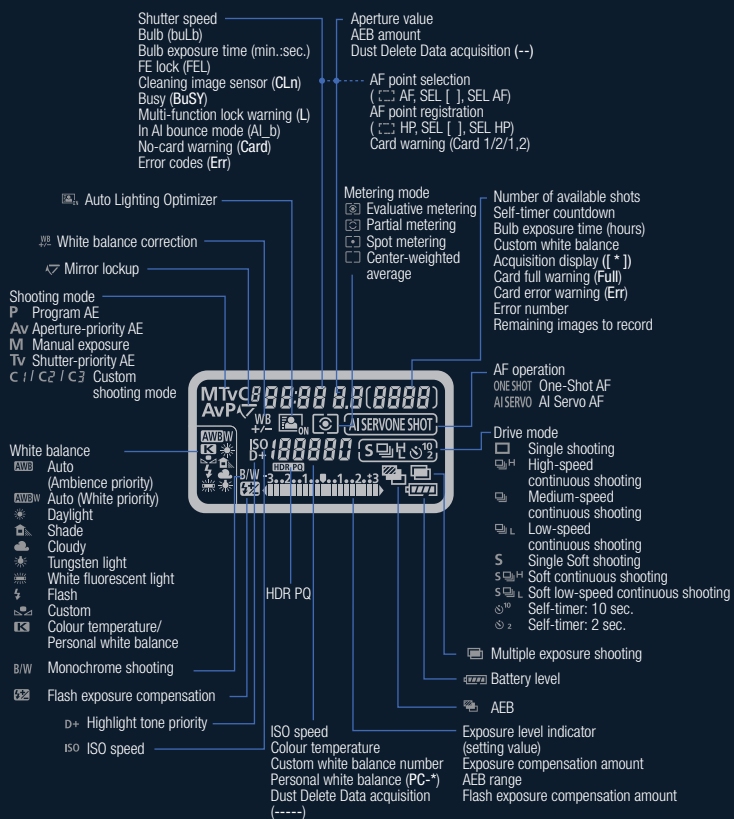

REAR LCD PANEL

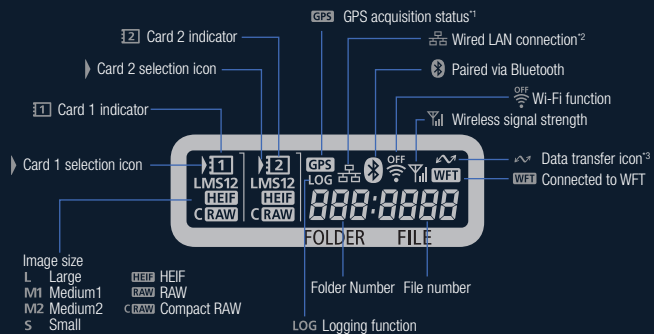

^{*1} Appears when built-in GPS features are used. ^{*2} Appears when connected to a wired LAN. ^{*3} Appears when connected to a computer or smartphone.

SPECIFICATIONS

TYPE	
Type	Digital single-lens reflex AF/AE camera
Recording media	CFexpress memory card *Type B compatible: 2 card slots
Image sensor size	35.9×23.9 mm
Compatible lenses	Canon EF lens product groups *Excluding EF-S and EF-M lenses
Lens mount	Canon EF mount

IMAGE SENSOR	
Type	CMOS sensor
Effective pixels	Approx. 20.1 megapixels *Rounded to the nearest 100,000.
Aspect ratio	3:2

RECORDING SYSTEM		
Recording format	DCF 2.0	
Image type	JPEG (8-bit), HEIF (10-bit), RAW (14-bit Canon original) RAW+JPEG simultaneous recording possible RAW+HEIF simultaneous recording possible	
Pixels recorded	Image Quality	
	JPEG	Pixel Count
		L
		M1
		M2
		S
	HEIF	L
	RAW	RAW/C-RAW
*Rounded to the nearest 100,000.		

IMAGE PROCESSING DURING SHOOTING	
Picture style	Auto, Standard, Portrait, Landscape, Fine Detail, Neutral, Faithful, Monochrome, User Defined 1–3
White balance	Auto (Ambience priority), Auto (White priority), Preset (Daylight, Shade, Cloudy, Tungsten light, White fluorescent light, Flash), Custom (5 settings), Colour temperature setting (approx. 2500–10000 K) White balance correction and bracketing available *Flash Colour temperature information transmission possible
Automatic image brightness correction	Auto Lighting Optimizer
Highlight tone priority	Available
Lens aberration correction	Peripheral illumination correction, Distortion correction, Digital Lens Optimizer, Chromatic aberration correction, Diffraction correction

VIEWFINDER	
Type	Eye-level pentaprism
Field of view (coverage)	Vertical/Horizontal approx. 100% (with eyepoint approx. 20 mm)
Magnification	Approx. 0.76× (−1 m ^{−1} with 50 mm lens at infinity)
Eyepoint	Approx. 20 mm (from eyepiece lens end at −1 m ^{−1})
Dioptic adjustment range	Approx. −3.0 to +1.0 m ^{−1} (dpt)
Eyepiece shutter	Built-in
Focusing screen	Fixed

AUTOFOCUS (VIEWFINDER SHOOTING)	
Focus method	TTL secondary image-registration, phase-difference detection with the dedicated AF sensor
AF points	191 points max. (cross-type AF points: 155 points max.) *Number of available AF points, Dual cross-type AF points, and Cross-type AF points vary depending on the lens used. *Dual cross-type focusing at f/2.8 with center AF point
Focusing brightness range	EV −4 to 21 (with the center AF point supporting f/2.8, One-Shot AF, room temperature, ISO 100)
Focus operation	One-Shot AF, AI Servo AF, manual focusing (MF)
AF area selection mode	Spot AF (manual selection), 1-point AF (manual selection), AF point expansion (manual selection, vertical/horizontal), AF point expansion (manual selection: surround), Zone AF (manual selection of zone), Large zone AF (manual selection of zone), Auto selection AF
Subject detection AF	EOS iTR AF setting (can recognize colour information, faces, and heads) *iTR: Intelligent Tracking and Recognition
AI Servo AF characteristics	Tracking sensitivity, Acceleration/deceleration tracking
AF fine adjustment	AF Microadjustment (All lenses by the same amount, adjust by lens)

AUTOFOCUS (LIVE VIEW SHOOTING/MOVIE RECORDING)	
Focus method	Dual Pixel CMOS AF *AF not available in RAW or 4K 59.94p/50.00p (NTSC/PAL) movie recording
AF method	Face+Tracking, Spot AF, 1-point AF, Expand AF area (vertically/horizontally), Expand AF area: Around, Zone AF, Large Zone AF: Vertical, Large Zone AF: Horizontal
Available AF point positions	Max. 3869 *When selected with the Multi-controller
Available AF areas when automatically selected	Max. 525

Eye Detection AF	Available
Magnified view	Approx. 5×/10×
AF area	Horizontal: Approx. 90%, Vertical: Approx. 100% Horizontal: Approx. 80%, Vertical: Approx. 80% *Varies depending on the lens used
Manual focus (MF)	MF peaking, Focus guide

[Live View shooting]	
AF operation	One-Shot AF, Servo AF
Continuous AF	Available
Focusing brightness range	EV −6 to 18 (f/1.2, center AF point, at room temperature, ISO 100, One-Shot AF)
Servo AF characteristics	Tracking sensitivity, Acceleration/deceleration tracking

[Movie recording]	
Focusing brightness range	EV −4 to 18 f/1.2, center AF point, at room temperature, ISO 100, One-Shot AF, 29.97 fps)
Movie Servo AF	Available
Movie Servo AF characteristics	Tracking sensitivity, AF speed

EXPOSURE CONTROL	
Metering mode	Viewfinder shooting: 216-zone (18×12) TTL open-aperture metering with an approx. 400,000-pixel RGB+IR metering sensor Live View shooting/movie recording: 384-zone (24×16) metering with signals from the image sensor
Metering mode	Viewfinder shooting: Evaluative metering, Partial metering (approx. 6.2% of screen), Spot metering* (approx. 1.5% of screen), Center-weighted average metering *Options include spot metering linked to AF points and multi-spot metering Live View shooting: Evaluative metering, Partial metering (approx. 5.8% of screen), Spot metering (approx. 2.9% of screen) Movie recording: Center-weighted average metering, Evaluative metering *Set automatically based on shooting conditions
Focusing brightness range	Viewfinder shooting: EV 0 to 20 (at room temperature, ISO 100) Live View shooting/movie recording: EV −3 to 20 (at room temperature, ISO 100)
Shooting mode	Still photo shooting: Program AE, Shutter-priority AE, Aperture-priority AE, Manual exposure, Bulb exposure, Custom shooting modes (C1/C2/C3) Movie recording: Program AE, Shutter-priority AE, Aperture-priority AE, Manual exposure, Custom shooting modes (C1/C2/C3)
ISO speed (recommended exposure index)	Still photo shooting: ISO Auto, manually set within ISO 100–102400 (in 1/3- or 1-stop increments), expandable to L (ISO 50), H1 (ISO 204800), H2 (ISO 409600), or H3 (ISO 819200) *ISO 200–102400 with Highlight tone priority set Movie recording: Program AE/Av/Tv: ISO Auto, expandable to H1 (ISO 204800) M: ISO Auto, manually set within ISO 100–25600 (in 1/3- or 1-stop increments), expandable to H1 (ISO 204800) *ISO 200–25600 with Highlight tone priority set
Exposure compensation	Manual: ±5 stops in 1/3- or 1/2-stop increments (viewfinder shooting), or ±3 stops in 1/3- or 1/2-stop increments (Live View shooting, movie recording) AEB: ±3 stops in 1/3- or 1/2-stop increments (can be combined with manual exposure compensation)
Flicker reduction	Available (viewfinder shooting)

MULTIPLE EXPOSURES	
Shooting method	Function/control priority, Continuous shooting priority
Number of multiple exposures	2 to 9 exposures
Multiple-exposure control	Additive, Average, Bright, Dark

HDR SHOOTING (STILL PHOTO HDR PQ)	
Recording format	HEIF
Bit depth	10-bit
Colour sampling	YCbCr 4:2:2
HDR specification	ITU-R BT.2100 (PQ)

SHUTTER	
Type	Electronically controlled, focal-plane shutter
Shutter mode	Viewfinder shooting: Mechanical Live View shooting: Mechanical, Electronic 1st-curtain, Electronic
Shutter speed	Mechanical/Electronic 1st-curtain set: 1/8000 sec. to 30 s, Bulb Electronic set: 1/8000 s to 0.5 s Max. shutter speed with flash sync: 1/250 s *Setting range differs when recording movies

DRIVE SYSTEM	
Drive mode	Single shooting, High-speed continuous shooting, Medium-speed continuous shooting, Low-speed continuous shooting, Single Soft shooting, Soft continuous shooting, Soft low speed continuous shooting, Self-timer: 10 s, Self-timer: 2 s

Continuous shooting speed (AF/AE)	Drive Mode	Viewfinder Shooting	Live View Shooting ²
	High-speed continuous shooting ¹	Max. approx. 16 shots/s	Max. approx. 20 shots/s
	Medium-speed continuous shooting	Approx. 10 shots/s	Approx. 10 shots/s ³
	Low-speed continuous shooting	Approx. 3.0 shots/s	Approx. 3.0 shots/ s
	Soft continuous shooting	Approx. 8.0 shots/s	Approx. 10 shots/ s ³
	Soft low speed continuous	Approx. 3.0 shots/s	Approx. 3.0 shots/ s
	^{*1} May be lower depending on conditions such as shutter speed, aperture, state of aperture during continuous shooting, use of flash, use of flicker reduction, battery level, temperature, subject conditions, brightness (as when shooting under low light), type of lens, type of power, and if internal memory becomes full (which temporarily disables shooting). ^{*2} With the electronic shutter, continuous shooting speed is equivalent to the speed in high-speed continuous shooting. ^{*3} With the mechanical shutter, continuous shooting speed is approx. 8.0 shots/s		
Maximum burst	JPEG Large: 1,000 shots or more HEIF Large: 1,000 shots or more RAW: 1,000 shots or more RAW+JPEG Large: 1,000 shots or more RAW+HEIF Large: approx. 350 shots [*] In viewfinder shooting with a 325 GB card conforming to Canon testing standards [*] Varies depending on shooting conditions (such as when JPEG/HEIF image quality is set to 8, as well as the subject, memory card brand, ISO speed, Picture Style, and Custom Functions)		

EXTERNAL SPEEDLITE

Compatible Speedlites	EL/EX series Speedlites
Flash metering	E-TTL II autoflash
Flash exposure compensation	±3 stops in 1/3- or 1/2-stop increments
FE lock	Available
PC terminal	Available
Flash control	Flash function settings, Flash Custom Function settings

MOVIE RECORDING

Movie recording size & frame rate	RAW (5472×2886) : 59.94p/50.00p/29.97p/25.00p/24.00p/23.98p 4K DCI (4096×2160) : 59.94p/50.00p/29.97p/25.00p/24.00p/23.98p 4K DCI cropped (4096×2160) : 59.94p/50.00p/29.97p/25.00p/24.00p/23.98p 4K UHD (3840×2160) : 59.94p/50.00p/29.97p/25.00p Full HD (1920×1080) : 119.9p/100.0p/59.94p/50.00p/29.97p/25.00p [*] 119.9p/100.0p used for High Frame Rate movies
Compression method	ALL-I (For editing), IPB (Standard), IPB (Light)
Card performance requirements (writing/reading speed)	RAW: CFexpress 1.0 (330 MB/sec. or faster) 4K DCI (ALL-I/IPB)/4K UHD (ALL-I/IPB)/Full HD (ALL-I/IPB (Light)): CFexpress 1.0
Time code	Can be added
Sound recording	Built-in monaural microphone; external stereo microphone terminal included, and line input supported Sound-recording level adjustable, wind filter provided, attenuator provided
Headphone	Headphone terminal provided, volume adjustable
Movie Digital IS	Available
Canon Log	Available as a shooting option
Still photo shooting	Not available during movie recording
HDMI output	Image output without information display available [*] 4K output supported; Auto/1080p selectable

SCREEN

Type	TFT colour, liquid-crystal monitor
Screen size and dots	Approx. 8.01 cm (3.15 in.) (3:2) with approx. 2.1 million dots
Touch-screen panel	Capacitive sensing

PLAYBACK

Image display format	Without shooting information, with basic information, with detailed shooting information, index display (4/9/36/100 images)
Highlight alert	Overexposed highlights blink
Magnified view	Approx. 1.5×–10×, initial magnification and position settable
Voice memo	Recording and playback
Converting HEIF to JPEG	Available
In-camera RAW image processing	Brightness adjustment, White balance, Picture Style, Clarity, Auto Lighting Optimizer, High ISO speed noise reduction, Image quality, Colour space, Lens aberration correction (Peripheral illumination correction, Distortion correction, Digital Lens Optimizer, Chromatic aberration correction, Diffraction correction)
Print order	DPOF Version 1.1 compatible

• All data above is based on Canon testing standards and CIPA (Camera & Imaging Products Association) testing standards and guidelines. • Dimensions and weight listed above are based on CIPA Guidelines (except weight for camera body only). • Product specifications and appearance are subject to change without notice. • If a problem occurs with a non-Canon lens attached to the camera, contact the respective lens manufacturer.

COMMUNICATION FUNCTIONS

[Wi-Fi]	
Standards compliance	IEEE 802.11b/g/n
Transmission method	DS-SS modulation (IEEE 802.11b), OFDM modulation (IEEE 802.11g/n)
Transmission frequency (central frequency)	Frequency: 2412 to 2462 MHz Channels: 1–11
Connection method	Camera access point mode, infrastructure [*] [*] Wi-Fi Protected Setup supported
Security	Authentication method: Open system, Shared key, or WPA/WPA2-PSK Encryption: WEP, TKIP, AES
Compatible devices	Smartphone, computer, FTP server

[Wired LAN]

Type	Ethernet
Standards compliance	IEEE 802.3u (10BASE-T/100BASE-TX/1000BASE-T)
Compatible devices	Access point, computer, EOS-1D X Mark III [*] [*] When syncing time between cameras

[Bluetooth]

Standards compliance	Bluetooth Specification Version 4.2 compliant (Bluetooth low energy technology)
Transmission method	GFSK modulation
Compatible devices	Smartphone

GPS FEATURES

Compatible satellites	GPS satellites (USA), GLONASS satellites (Russia), Quasi-Zenith Satellite System Michibiki (Japan)
Image geotagging	Latitude, longitude, elevation, Coordinated Universal Time (UTC), signal acquisition status
Log data	One file generated daily, NMEA format [*] Change of time zone creates a separate file [*] Log data in internal memory can be transferred to cards or imported to a computer as log files
Log data deletion	Available

CUSTOMIZATION FEATURES

Custom Functions	38 functions
Custom Quick Control	Available
Saving camera settings	Up to 10 settings can be registered on a card
My Menu	Up to 5 screens can be registered
Copyright information	Text entry and appending possible
IPTC information	Can be added

INTERFACES

Digital terminal	SuperSpeed Plus USB (USB 3.1 Gen 2) equivalent, USB Type-C Computer communication
HDMI mini OUT terminal	Type C (auto switching of resolution)
External microphone input/line input terminal	3.5 mm diameter stereo mini-jack Directional Stereo Microphone DM-E1, Stereo Microphone DM-E100, or commercially available external microphones can be connected
Headphone terminal	3.5 mm diameter stereo mini-jack
Remote control terminal	For N3-type remote control units
System extension terminal	Wireless File Transmitter WFT-E9 connection
Ethernet terminal	RJ-45 terminal

POWER

Battery	Battery Pack LP-E19, quantity: 1 [*] AC power usable with household power outlet accessories
Number of available shots	Viewfinder shooting: Approx. 2850 shots at room temperature (+23°C/73°F), approx. 2360 shots at low temperatures (0°C/32°F) Live View shooting: Approx. 610 shots at room temperature (+23°C/73°F), approx. 530 shots at low temperatures (0°C/32°F) [*] With a fully charged Battery Pack LP-E19.
Movie recording time available	Total approx. 4 hr. 40 min. at room temperature (+23°C/73°F) Total approx. 4 hr. 10 min. at low temperatures (0°C/32°F) [*] Using a fully charged Battery Pack LP-E19 with Movie Servo AF disabled to record Full HD 29.97p/25.00p IPB (Standard)

DIMENSIONS AND WEIGHT

Dimensions (W×H×D)	158.0×167.6×82.6 mm/6.22×6.60×3.25 in.
Weight	1440 g/50.80 oz. (including battery pack and card)/Approx. 1250 g/44.09 oz. (body only)

OPERATING ENVIRONMENT

Working temperature range	0–45°C (32–113°F)
Working humidity	85% or less

EOS-1DX

Mark III

MRP : ₹ 575 995.00/U incl. of all taxes

Including 512 GB CF Express Card and Reader

DISCLAIMERS : This document is for information only and the contents are subject to change without notice. Errors and omissions excepted. Images are simulated. Weight and dimensions are approximates. Nothing in this document should be construed as a warranty. Product/ Service options, name and availability may vary by region. We expressly disclaim any liability or contractual obligations with respect to this document. Canon and Power Shot, among others are trademark of Canon Inc. and /or/its affiliates. Other names, marks and logos contained in this document may be the registered trademarks or trademarks of their respective owners.

Canon India Pvt. Ltd.

**Corporate Office: 7th and 8th Floor, Tower B, Building No. 5,
DLF Epitome, DLF Phase III, Gurugram – 122002**

Visit us on: in.canon

For Canon Service Centers, Call: 1860 180 3366; <http://bit.ly/canonservicenetwork>

Follow **CANON India** on



Follow **canonindia_official** on



GET THE EDGE

A Community of Photographers More details on
<https://edge.canon.co.in/gettheedge/>

Insist on an original warranty by your sales office. Specifications are subject to change without notice. Images are simulated.

To know more visit <https://edge.canon.co.in/EOS-1DXMarkIII/>