

110 million
EOS

160 million
RF

Canon
Delighting You Always

RF LENSES

2026-2027



WIDE-ANGLE
ZOOM LENSES



STANDARD/MEDIUM
TELEPHOTO LENSES



MACRO
LENSES



RF-S
LENSES



VR
LENSES



RF85mm f/1.4 VCM
Photo Credit: Nitin Arora

EOS R SYSTEM: REIMAGINE OPTICAL EXCELLENCE


A whole new system with a game-changing RF Lens Mount that delivers optical excellence today and incredible possibilities for future designs. The EOS R Series mirrorless System provides gorgeous results with native RF Lenses, together with 3 optional mount adapters that ensure seamless compatibility with your EF and EF-S Lenses. With advanced features and compact designs, the brand new EOS R System is designed to take today's visual storytellers into tomorrow.

A 54mm diameter lens mount enables RF Lenses to have large rear elements, while a mirrorless design brings them closer to the sensor for bright, sharp and compact lens designs. A 12-pin electronic connection delivers fast communication between the camera and the lens, facilitating a versatile and powerful system. Plus, with a variety of mount adapter options providing compatibility with EF and EF-S Lenses, it's easy to incorporate your EOS R System into an EOS System and expand your creative opportunities.

A NEW STANDARD IN OPTICAL IMAGE QUALITY

At the heart of the EOS R System lies the amazing RF Mount. It's newly designed to deliver the ideal combination of speed, durability and flexibility in optical design for excellent performance and future system expansion, plus compatibility with EF and EF-S Lenses*.

RF MOUNT

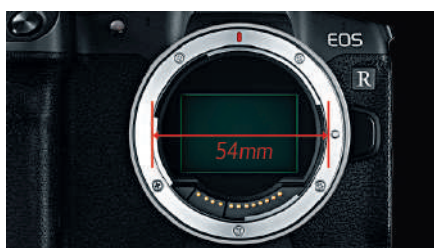


54mm Large Diameter and Short Back Focus

The large diameter and decreased distance between the rear lens element and sensor enable a compelling combination of image quality, performance and compact lens design. Thanks to the mirrorless structure of EOS R System cameras, the rear lens element can be much closer to the image plane. This combination opens up a number of possibilities. The rear element of RF Lenses can be larger in diameter, improving image quality at the corners and outer edges of the frame. Larger rear elements mean front elements can be smaller, meaning lesser refraction and bending of light rays within the lens, enhancing optical performance. Most importantly, the EOS R System opens the door to the future. It unlocks more freedom and flexibility in lens designs, allowing faster lenses with increased optical performance in more compact forms.



Data Transmission through 12-pin Electrodes

A 12-pin connection between the camera and lens means communication at a higher speed with larger amount of data transfer, enabling incredibly fast autofocus (AF), and superior image stabilisation (IS). It's a system designed to expedite operations that's ready for future expansions

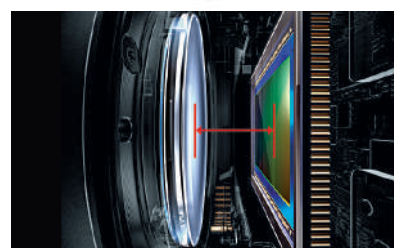

20mm Flange Focal Distance

The RF Mount is mounted just 20mm from the image sensor. This provides flexibility for future lens designs and the durability needed for professional, real-world operations, even when using super telephoto lenses.



* Optional Mount Adapters are required when using EF/EF-S Lenses with an EOS R System Camera



RF800mm f/11 IS STM

BEYOND FULL COMPATIBILITY

Discover New Possibilities with EF/EF-S Lenses

Mount adapters deliver seamless connections between the EOS R System Cameras and EF/EF-S Lenses with all functions intact. Offering L-Series-level weather and dust sealing, the Mount Adapters are even compatible with EF Extenders such as the Extender EF 1.4x III to extend your camera's optical reach. With an entire line-up of EF and EF-S Lenses at your disposal, these mount adapters ensure endless creative possibilities for the EOS R System Cameras.

Additional Control with EF/EF-S Lenses


Take full advantage of the EOS System by using any EF/EF-S Lens with the EOS R System Cameras by way of three optional mount adapters, including one featuring a customisable control ring and another allowing you to drop in a circular polarising or variable ND Filter.






RF15-35mm f/2.8L IS USM
Photo Credit: Ravi Dhingra

NEW LENS DESIGNS WITH STELLAR IMAGE QUALITY AMAZING PERFORMANCE

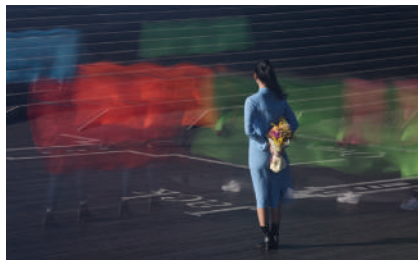


Optical Image Stabilisation

Designed specifically for the EOS R System, select RF Lenses feature Optical Image Stabilisation technology that's designed to work in conjunction with the EOS R System Cameras. With faster data sharing, the RF Lenses offer enhanced image stabilisation as well as image quality optimisation.

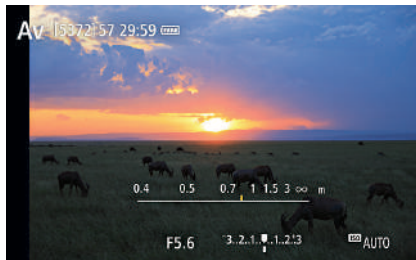

Lens Information Display

EOS R System Cameras can display lens information right in the viewfinder, making it easy to confirm the settings without looking away from the subject at hand.

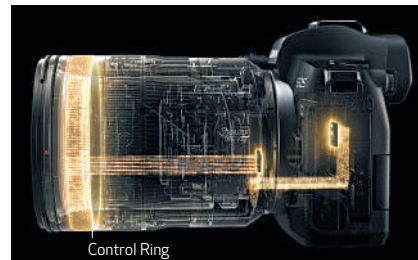

Control Ring

Almost all RF Lenses incorporate a control ring on the lens barrel that can directly adjust numerous settings including shutter speed, aperture, exposure compensation and more. Located within the lens and effectively adding a third dial to the EOS R System Cameras' main dial and quick control dial, the control ring has a tactile, easily distinguished surface and features a clicking mechanism that provides tangible feedback for confident use, while looking through the viewfinder.



ULTRA-WIDE/WIDE-ANGLE ZOOM LENSES

RF7-14mm f/2.8-3.5L Fisheye STM



New

The dramatically different fisheye lens. Shoot stand-out 190° circular or 180° full-frame images with a fast and lightweight professional zoom.

MRP

₹ 160 495.00/U

inclusive of all taxes

RF10-20mm f/4L IS STM



World's first rectilinear ultra-wide angle zoom lens for full frame cameras to offer 10mm wide end with class-leading image quality and portability along with L-lens grade build and image quality.

MRP

₹ 244 495.00/U

inclusive of all taxes

RF14-35mm f/4L IS USM



Ultra-wide coverage lens that changes the ordinary visuals extraordinary while shooting videos, landscapes, architecture, interiors, travel or creative perspectives that leverage lens effects.

MRP

₹ 158 995.00/U

inclusive of all taxes

RF15-35mm f/2.8L IS USM



The RF15-35mm f/2.8L IS USM is a bright ultra-wide zoom lens with a constant f/2.8 maximum aperture at any focal length, perfect for shooting landscapes, architecture, interiors and more.

MRP

₹ 236 995.00/U

inclusive of all taxes

RF16-28mm f/2.8 IS STM



A compact, ultra-wide angle zoom with a fast f/2.8 aperture and image stabilization that's lightweight, versatile, and ready for your next storytelling adventure.

MRP

₹ 113 995.00/U

inclusive of all taxes

RF15-30mm f/4.5-6.3 IS STM



Small and light RF lens that offers a wide zoom range. With close focusing and powerful image stabilisation, it's perfect for sweeping landscapes and video.

MRP

₹ 57 995.00/U

inclusive of all taxes

RF14mm f/1.4 L VCM



A compact, lightweight ultra-wide prime with a fast f/1.4 aperture, delivering superb stills and video for astrophotography, landscapes and beyond.

MRP

₹ 230 995.00/U

inclusive of all taxes

RF16mm f/2.8 STM



An ultra wide-angle lens with large aperture at a price point that is affordable for any professional. The lens retains performance in a very compact form factor.

MRP

₹ 29 495.00/U

inclusive of all taxes

RF20mm f/1.4L VCM



A fast, ultra-wide prime lens ideal for astro, architecture, landscape & documentary works. It features advanced optics, silent autofocus, and weather sealing for professional performance.

MRP

₹ 158 995.00/U

inclusive of all taxes

STANDARD/MEDIUM TELEPHOTO LENSES

RF24mm f/1.4 L VCM



A hybrid lens made for stills and video, incorporates super-sharp optics and helpful filmmaking features – is ideal for immersive landscapes, architecture and more.

MRP

₹ 148 995.00/U
inclusive of all taxes

RF28mm f/2.8 STM



Slim pancake design lens, an ideal lens for wide world creativity in everyday life thanks to its combination of tiny size, versatile focal length and fast f/2.8 aperture.

MRP

₹ 31 495.00/U
inclusive of all taxes

RF35mm f/1.4 L VCM



A hybrid lens designed for stills and video, the natural wide-angle of view and a fast f/1.4 aperture make this lens an inspired choice for creative storytelling.

MRP

₹ 154 495.00/U
inclusive of all taxes

STANDARD/MEDIUM TELEPHOTO LENSES

RF20-50mm f/4 L IS USM PZ



New

An internal power zoom full-frame lens. Craft dynamic videos and photos with fluid servo or precise manual zoom.

MRP

₹ 149 995.00/U
inclusive of all taxes

RF24-50mm f/4.5-6.3 IS STM



Lens that supports a wide range of shooting conditions and venues, from casual snapshots and everyday scenes to photos of food, small daily items, portraits and vlogging.

MRP

₹ 31 995.00/U
inclusive of all taxes

RF24-70mm f/2.8 L IS USM



Part of the highly sought-after RF f/2.8 zoom trinity series. It offers impeccable image quality in a lightweight body with a bright f/2.8 aperture at any focal length in its zoom range.

MRP

₹ 236 995.00/U
inclusive of all taxes

RF28-70mm f/2L USM



The RF28-70mm f/2L USM features a maximum aperture of f/2, offering throughout its zoom range. With L Series optics, it offers the flexibility and performance of a handful of fixed focal length lenses.

MRP

₹ 306 495.00/U
inclusive of all taxes

RF28-70mm f/2.8 IS STM



Capture more of what you love every day with this lightweight, compact, and versatile standard zoom lens, boasting a fast aperture, image stabilization and filmmaking features.

MRP

₹ 118 495.00/U
inclusive of all taxes

RF24-105mm f/2.8 L IS USM Z



A professional 24-105mm zoom lens for filmmaking and stills, combining uncompromised engineering, a fast and bright f/2.8 aperture plus exceptional sharpness, ideal for hybrid workflows.

MRP

₹ 309 995.00/U
inclusive of all taxes

STANDARD/MEDIUM TELEPHOTO LENSES

RF24-105mm f/4L IS USM



The RF24-105mm f/4L IS USM is versatile with its broad zoom range and constant f/4 maximum aperture, making it ideal for landscapes, portraits and much more. It features Canon's Nano USM for fast and quiet AF in moving shooting.

MRP

₹ 118 995.00/U
inclusive of all taxes

RF24-105mm f/4-7.1 IS STM



Designed not only to be light and compact, the RF24-105mm f/4-7.1 IS STM is also a very versatile lens that even have macro function and would not weigh you down as you shoot to explore the creative possibilities.

MRP

₹ 39 995.00/U
inclusive of all taxes

RF45mm f/1.2 STM



A fast prime lens designed for RF-mount cameras, offering exceptional sharpness, creamy bokeh, and outstanding low-light performance with its wide f/1.2 aperture.

MRP

₹ 42 495.00/U
inclusive of all taxes

RF50mm f/1.8 STM



A high-quality yet affordable fixed focal length lens with a large aperture of f/1.8 that delivers amazingly soft bokeh, highly portable and versatile. perfect for food, snapshots and portrait photography.

MRP

₹ 20 995.00/U
inclusive of all taxes

RF50mm f/1.2L USM



This Lens with 10 aperture blades and offering the widest aperture available in the RF line-up, its f/1.2 aperture means amazing performance in low light and beautiful detailed images with evocative background blur.

MRP

₹ 240 495.00/U
inclusive of all taxes

RF50mm f/1.4L VCM



A simple answer to impressive images and cinematic video. A hybrid lens for portraits, video, and creative storytelling to shoot with confidence broadly in any genre.

MRP

₹ 140 495.00/U
inclusive of all taxes

RF85mm f/1.4 L VCM



New

A high-performance hybrid 85mm portrait lens with stunning sharpness, soft bokeh and a bright f/1.4 aperture for dramatic photos and video.

MRP

₹ 158 495.00/U
inclusive of all taxes

RF85mm f/1.2L USM



The RF85mm f/1.2L USM is an ultra-fast prime lens that is great for low-light situations. It features an impressive 9-blade circular aperture with a maximum aperture of f/1.2, producing superb bokeh for stunning portraits.

MRP

₹ 275 995.00/U
inclusive of all taxes

RF85mm f/1.2L USM DS



The highest optical performance lens at maximum aperture. The Defocus Smoothing (DS) ensures smooth out-of-focus regions, producing soft and natural bokeh with delightful highlights and even fall-offs.

MRP

₹ 314 995.00/U
inclusive of all taxes

STANDARD/MEDIUM TELEPHOTO LENSES

RF135mm f/1.8L IS USM



An ideal for portraits, keeping the right distance for communication with the subject but not too far away like with telephoto lenses. The compression effect and greater bokeh enable beautiful portraits with a sense of perspective.

MRP
₹ **219 995.00/U**
inclusive of all taxes

TELEPHOTO/SUPER TELEPHOTO LENSES

RF24-240mm f/4-6.3 IS USM



10x optical zoom in a compact body, making it superb for travel and outdoor usage. Driven by the tiny Nano USM to achieve superb speed when focusing, while maintaining quiet and smooth transition, even for videos.

MRP
₹ **92 995.00/U**
inclusive of all taxes

RF70-200mm f/2.8L IS USM



A remarkably fast and consistent telephoto zoom lens, across its entire focal length with its large f/2.8 aperture. The Rugged built and compact design makes it ideal for sports, portrait, wedding and wildlife photography.

MRP
₹ **275 995.00/U**
inclusive of all taxes

RF75-300mm F4-5.6



A budget-friendly telephoto zoom lens for RF-mount cameras, offering a versatile 75–300mm range (120–480mm equivalent on APS-C), ideal for casual sports, wildlife, and portraits

MRP
₹ **20 995.00/U**
inclusive of all taxes

RF70-200mm F2.8 L IS USM Z (BK/WH)



A professional 70-200mm telephoto lens for filmmaking and stills, with a fast and bright f/2.8 aperture and additional reach for diverse shooting scenarios.

MRP
₹ **310 495.00/U**
inclusive of all taxes

RF70-200mm f/4L IS USM



Measuring less than 12cm and weighs only approx. 695g, making its size similar to a standard zoom lens. However, this lens packs a high resolving power to deliver stunning quality across the entire focal range.

MRP
₹ **169 995.00/U**
inclusive of all taxes

RF100-300mm f/2.8L IS USM



When you need the incredible focusing speed, sharpness, weather sealing and performance of a L-series prime lens plus the versatility of a zoom, the RF 100-300mm F2.8L IS USM gives you both.

MRP
₹ **964 995.00/U**
inclusive of all taxes

RF100-400mm f/5.6-8 IS USM



Significantly lightweight at 635g and native 5.5-stop image stabilisation this lens works perfectly with both the Extenders RF 1.4x and RF 2x, making it a perfect lens for wildlife photography.

MRP
₹ **76 995.00/U**
inclusive of all taxes

RF100-500mm f/4.5-7.1L IS USM



The first super-telephoto zoom lens for the RF mount, It is one of the most versatile RF optics for sports and wildlife photography. The lens's IS can dramatically reduce camera shake up to 5 stops.

MRP
₹ **291 995.00/U**
inclusive of all taxes

TELEPHOTO/SUPER TELEPHOTO LENSES

RF200-800mm f/6.3-9 IS USM



Designed for casual handheld telephoto shooting at up to 800mm, not a single-focus lens but a 200-800mm zoom lens, it allows for both closeup and long-shot without the need of switching lenses.

MRP
₹ **206 495.00/U**
inclusive of all taxes

RF600mm f/11 IS STM



Shooting close-ups of sports, birds, wildlife and other faraway things is what the RF600mm f/11 IS STM does best. Weighing less than 1kg, with a compact, retractable design, it is easy to carry around and handle.

MRP
₹ **83 995.00/U**
inclusive of all taxes

RF800mm f/11 IS STM



One of the lightest super telephoto lenses, comes with up to 4 stops of image stabilisation to significantly reduce camera shake. The incredible portability and focal length open up new doors in wildlife photography and videography.

MRP
₹ **105 995.00/U**
inclusive of all taxes

RF400mm f/2.8L IS USM



Designed for professionals in mind, this lens surpasses expectations. A high-performance super-telephoto lens with class-leading image quality. Ideal for sports, action and wildlife photography.

MRP
₹ **1 226 995.00/U**
inclusive of all taxes

RF600mm f/4L IS USM



Designed for professionals who require top-notch capabilities and performance, this lens puts you right in the middle of the action. Ideal for sports and wildlife photography.

MRP
₹ **1 310 995.00/U**
inclusive of all taxes

RF800mm f/5.6L IS USM



Crafted for those who desire a professional quality ultra-telephoto lens, the RF800mm f/5.6L IS USM is perfect for photographing subjects from a distance like wildlife and sports.

MRP
₹ **1 677 995.00/U**
inclusive of all taxes

RF1200mm f/8L IS USM



Weighing only at approximately 3,340g, the RF1200mm f/8L IS USM is unbelievably smaller and much lighter than its EF equivalent and packed with features like up to 4 Stops IS.

MRP
₹ **1 992 995.00/U**
inclusive of all taxes

MACRO LENSES

RF24mm f/1.8 Macro IS STM



A compact wide-angle lens offering beautiful bokeh with its f/1.8 aperture even in low light and capture amazing close-ups with its 0.5x macro magnification.

MRP
₹ **61 495.00/U**
inclusive of all taxes

MACRO LENSES

RF35mm f/1.8 Macro IS STM



Compact, lightweight and easy to carry, this lens offers amazing versatility in a wide-angle macro lens. It has a 0.5x magnification ratio with up to 5-stop image stabilisation.

MRP
₹ **53 995.00/U**
inclusive of all taxes

RF100mm f/2.8L Macro IS USM



The RF 100mm f/2.8L Macro IS USM is a professional macro lens with class-leading 1.4x magnification and a variable Spherical Aberration Control to adjust Bokeh, opening the creative horizon.

MRP
₹ **136 995.00/U**
inclusive of all taxes

RF85mm f/2 Macro IS STM



Stunning bokeh for beautiful background separation, combined with macro and IS capabilities. This portrait lens makes it handy for portrait and wedding photographers.

MRP
₹ **59 995.00/U**
inclusive of all taxes

RF-S LENSES

RF-S10-18mm f/4.5-6.3 IS STM



An ultra-wide angle versatile zoom lens designed for Canon APS-C mirrorless cameras. This compact and lightweight lens is ideal for vlogging, landscapes, interiors, travel and more.

MRP
₹ **35 495.00/U**
inclusive of all taxes

RF-S14-30mm f/4-6.3 IS STM PZ



A compact, ultra-wide APS-C zoom lens with built-in power zoom, up to 5 stops of image stabilization, ideal for vlogging, snapshots travel & documentary making it perfect for handheld usage.

MRP
₹ **35 995.00/U**
inclusive of all taxes

RF-S18-45mm f/4.5-6.3 IS STM



New

Start your EOS R APS-C mirrorless journey with a lens that covers all your photo and video needs. It is light and compact, offers a 4-stop optical Image Stabilizer plus a useful 18-45mm zoom range for great results every day.

MRP
₹ **31 995.00/U**
inclusive of all taxes

RF-S55-210mm f/5-7.1 IS STM



Lens to capture beauty and highlights of the subjects, adding a sense of depth using compression and bokeh effects for greater creative expressiveness.

MRP
₹ **35 495.00/U**
inclusive of all taxes

RF-S18-150mm f/3.5-6.3 IS STM



Engineered to deliver versatility through its focal length, 7 stops of image stabilisation with compatible cameras and magnification of up to 0.59x while maintaining a compact size.

MRP
₹ **50 495.00/U**
inclusive of all taxes

VR LENSES

RF5.2mm f/2.8L DUAL FISHEYE



Captures 180-degree 3-Dimensional (3D) stereoscopic visuals and excellent performance even in low-light situations. This design enables a single sensor to receive light from both lenses, simplifying the recording of Virtual Reality (VR) videos via EOS R5/R5C.

MRP

₹ 188 995.00/U

inclusive of all taxes

RF-S 3.9mm F3.5 STM Dual fisheye



Step into virtual reality content creation with this innovative lens designed for APS-C cameras and currently supporting EOS R7. Realistic, immersive 3D VR filmmaking is now within reach

MRP

₹ 113 495.00/U

inclusive of all taxes

RF-S 7.8mm f/4 STM Dual



Enter a new era of spatial video and 3D VR creativity for APS-C cameras. Get ready to make your visuals pop with this lens for outstanding VR content.

MRP

₹ 49 495.00/U

inclusive of all taxes

RF EXTENDERS

Extender RF 1.4x



Extends a super telephoto lens's focal length by 1.4x, so that an 800mm focal length, for example, becomes 1120mm.

MRP

₹ 51 995.00/U

inclusive of all taxes

Extender RF 2x



Extends a super telephoto lens's focal length by 2x, so that an 800mm focal length, for example, becomes 1600mm.

MRP

₹ 61 995.00/U


inclusive of all taxes

How Virtual Reality Imaging Works




Two Fisheye Lenses

Recording is done with parallax using two fisheye lenses on one sensor.




Conversion

Through software, recordings are converted into equirectangular projections, a standard Virtual Reality format.



Projected to HMD


Cropped and converted recordings are projected into a head-mounted display (HMD) to simulate a human's vision.



3D Realism

The recordings will appear 3-Dimensional (3D) when viewed individually by the left and right eye due to parallax effect.

Mechanism of Virtual Reality Recording

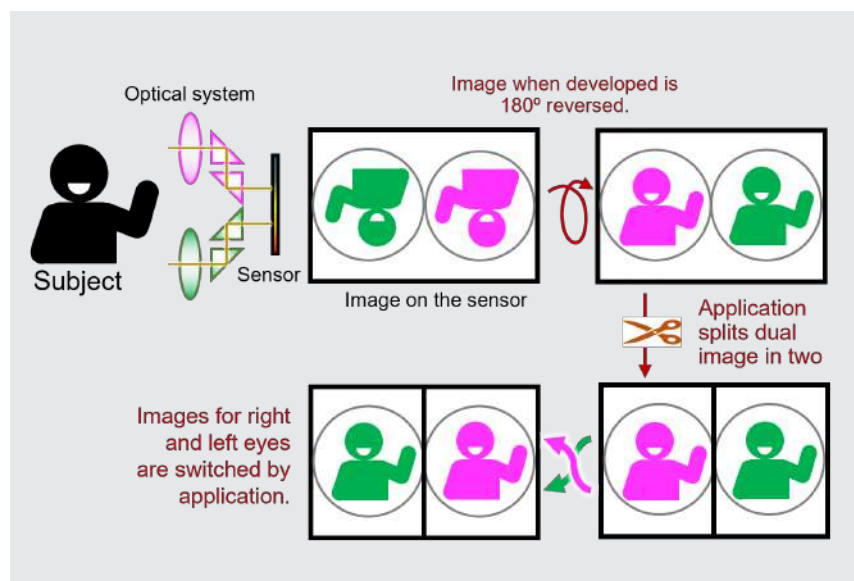


Single-Sensor Recording

Dual Fisheye enables users to harness the camera's 8K recording capabilities to produce ultra-high-definition 8K 180-degree VR footage with just one camera on one sensor.

Two Cameras No Longer Required

Conventional VR recording requires aligning of two cameras and syncing of camera positions, prior to shoot. Additional processes like colour matching and stitching are typically required as well after shooting.

Software Integration for Post-Production

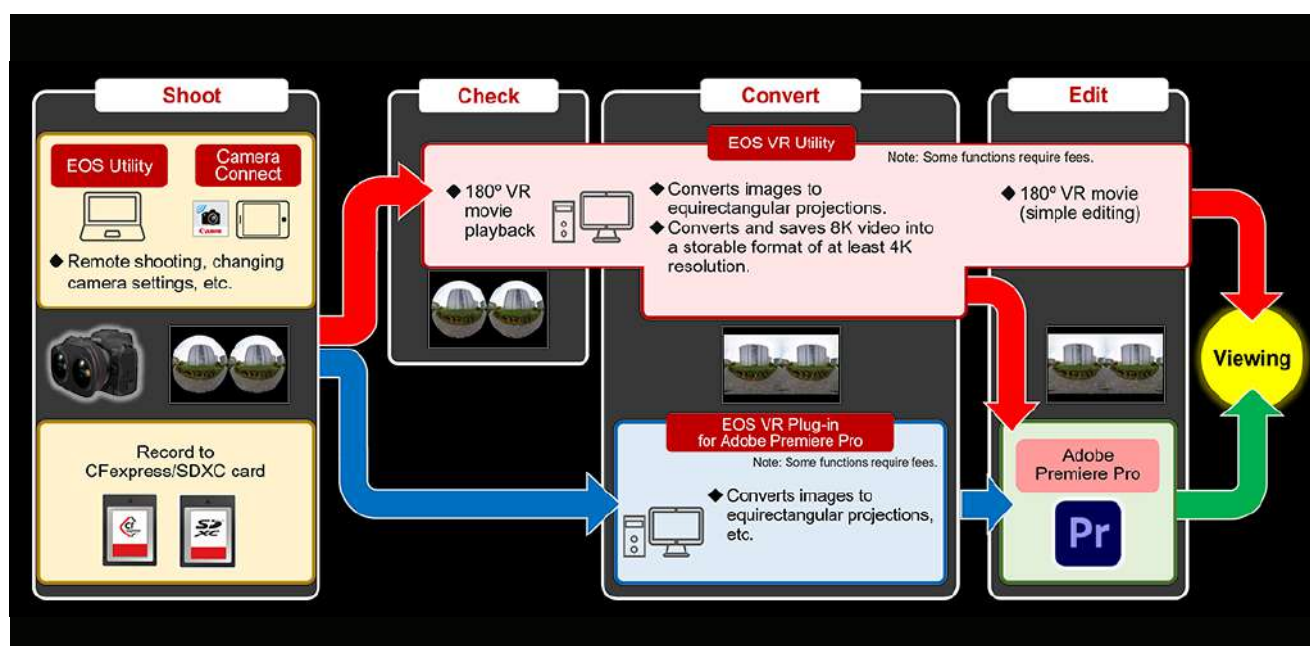

SPECIFICATIONS

RF LENSES

ULTRA-WIDE/WIDE-ANGLE LENSES

RF7-14mm f/2.8-3.5L Fisheye STM

Lens Construction	16 elements in 11 groups
Diagonal Angle of View	190° - 180°
Focusing Actuator	STM
Minimum Focusing Distance	0.15m
Optical Image Stabilisation	-
Aperture Blades	9 blades
Filter Size	Rear Drop-in Filter A
Maximum Diameter & Length	Ø76.5 x 109.4mm
Weight	476g

RF14-35mm f/4L IS USM

Lens Construction	16 elements in 12 groups
Diagonal Angle of View	114°30' - 63°00'
Focusing Actuator	Nano USM
Minimum Focusing Distance	0.2m
Optical Image Stabilisation	Up to 5.5 stops (CIPA Standards)
Aperture Blades	9 blades
Filter Size	77mm
Maximum Diameter & Length	Ø84.1 x 99.8mm
Weight	540g

RF16-28mm f/2.8 IS STM

Lens Construction	16 elements in 13 groups
Diagonal Angle of View	108°10' - 75°00'
Focusing Actuator	STM
Minimum Focusing Distance	0.25m
Optical Image Stabilisation	Up to 5.5 stops (CIPA Standards)
Aperture Blades	9 blades
Filter Size	67mm
Maximum Diameter & Length	Ø76.5 x 91mm
Weight	445g

RF14mm f/1.4L VCM

Lens Construction	18 elements in 13 groups
Diagonal Angle of View	114°
Focusing Actuator	VCM
Minimum Focusing Distance	0.24m
Optical Image Stabilisation	-
Aperture Blades	11 blades
Filter Size	Rear Gelatin Filter Holder Support Only
Maximum Diameter & Length	Ø76.5 x 112mm
Weight	578g

RF20mm f/1.4 L VCM

Lens Construction	15 elements in 11 groups
Diagonal Angle of View	94°00'
Focusing Actuator	Nano USM & VCM
Minimum Focusing Distance	0.24m
Optical Image Stabilisation	-
Aperture Blades	11 blades
Filter Size	67 mm
Maximum Diameter & Length	76.5 x 99.3
Weight	519g

RF28mm f/2.8 STM

Lens Construction	8 elements in 6 groups
Diagonal Angle of View	75°
Focusing Actuator	STM
Minimum Focusing Distance	0.23m
Optical Image Stabilisation	-
Aperture Blades	7 blades
Filter Size	55 mm
Maximum Diameter & Length	Ø69.2 x 24.7mm
Weight	120g

RF10-20mm f/4 L IS STM

Lens Construction	16 elements in 12 groups
Diagonal Angle of View	130° 25' - 94°
Focusing Actuator	Screw lead type STM
Minimum Focusing Distance	0.25m
Optical Image Stabilisation	Up to 5 stops (CIPA Standards)
Aperture Blades	9 blades
Filter Size	Rear Gelatin Filter Holder Support Only
Maximum Diameter & Length	Ø83.7 x 112mm
Weight	570g

RF15-35mm f/2.8L IS USM

Lens Construction	16 elements in 12 groups
Diagonal Angle of View	110°30' - 63°00'
Focusing Actuator	Nano USM
Minimum Focusing Distance	0.28m
Optical Image Stabilisation	Up to 5 stops (CIPA Standards)
Aperture Blades	9 blades
Filter Size	82mm
Maximum Diameter & Length	Ø88.5 x 126.8mm
Weight	840g

RF15-30mm f/4.5-6.3 IS STM

Lens Construction	13 elements in 11 groups
Diagonal Angle of View	110°30' - 71°35'
Focusing Actuator	STM
Minimum Focusing Distance	0.28m
Optical Image Stabilisation	Up to 5.5 stops (CIPA Standards)
Aperture Blades	7 blades
Filter Size	67 mm
Maximum Diameter & Length	Ø76.6 x 88.4mm
Weight	390g

RF16mm f/2.8 STM

Lens Construction	9 elements in 7 groups
Diagonal Angle of View	108°10'
Focusing Actuator	STM
Minimum Focusing Distance	0.13m
Optical Image Stabilisation	-
Aperture Blades	7 blades
Filter Size	43 mm
Maximum Diameter & Length	Ø69.2 x 40.1mm
Weight	165g

RF24mm f/1.4L IS VCM

Lens Construction	15 elements in 11 groups
Diagonal Angle of View	84°00'
Focusing Actuator	Nano USM & VCM
Minimum Focusing Distance	0.24m
Optical Image Stabilisation	-
Aperture Blades	11 blades
Filter Size	67 mm + Rear Gelatin Filter Holder
Maximum Diameter & Length	Ø76.5 x 99.3mm
Weight	515g

STANDARD/MEDIUM TELEPHOTO LENSES

RF35mm f/1.4L VCM

Lens Construction	14 elements in 11 groups
Diagonal Angle of View	63°
Focusing Actuator	Nano USM, VCM
Minimum Focusing Distance	0.28m
Optical Image Stabilisation	-
Aperture Blades	11 blades
Filter Size	67mm + Rear Gelatin Filter Holder
Maximum Diameter & Length	Ø76.5 x 99.3mm
Weight	555g

SPECIFICATIONS

RF LENSES

STANDARD/MEDIUM TELEPHOTO LENSES

RF20-50mm f/4 L IS USM PZ	
Lens Construction	13 elements in 11 groups
Diagonal Angle of View	94°-46°
Focusing Actuator	Dual Nano USM
Minimum Focusing Distance	0.24m
Optical Image Stabilisation	Up to 6 stops (CIPA Standards)
Aperture Blades	9 blades
Filter Size	67mm
Maximum Diameter & Length	Ø79.9 x 98.4mm
Weight	420g

RF24-70mm f/2.8L IS USM	
Lens Construction	21 elements in 15 groups
Diagonal Angle of View	84°00' - 34°00'
Focusing Actuator	Nano USM
Minimum Focusing Distance	0.21m
Optical Image Stabilisation	Up to 5 stops (CIPA Standards)
Aperture Blades	9 blades
Filter Size	82mm
Maximum Diameter & Length	Ø88.5 x 125.7mm
Weight	900g

RF28-70mm f/2.8 IS STM	
Lens Construction	15 elements in 12 groups
Diagonal Angle of View	75°- 34°
Focusing Actuator	STM
Minimum Focusing Distance	0.27m
Optical Image Stabilisation	Up to 5.5 stops (CIPA Standards)
Aperture Blades	9 blades
Filter Size	67mm
Maximum Diameter & Length	Ø76.5 x 92.2mm
Weight	490g

RF24-105mm f/4L IS USM	
Lens Construction	18 elements in 14 groups
Diagonal Angle of View	84°00' - 23°20'
Focusing Actuator	Nano USM
Minimum Focusing Distance	0.45m
Optical Image Stabilisation	Up to 5 stops (CIPA Standards)
Aperture Blades	9 blades
Filter Size	77mm
Maximum Diameter & Length	Ø83.5 x 107.3mm
Weight	700g

RF45mm f/1.2 STM	
Lens Construction	9 elements in 7 groups
Diagonal Angle of View	51° 20'
Focusing Actuator	STM
Minimum Focusing Distance	0.45m
Optical Image Stabilisation	-
Aperture Blades	9 blades
Filter Size	67mm
Maximum Diameter & Length	Ø78 x 75mm
Weight	346g

RF50mm f/1.2L USM	
Lens Construction	15 elements in 9 groups
Diagonal Angle of View	46°00'
Focusing Actuator	Ring-type USM
Minimum Focusing Distance	0.40m
Optical Image Stabilisation	-
Aperture Blades	10 blades
Filter Size	77mm
Maximum Diameter & Length	Ø89.8 x 108mm
Weight	950g

RF24-50mm f/4.5-6.3 IS STM	
Lens Construction	8 elements in 8 groups
Diagonal Angle of View	84°00' - 34°00'
Focusing Actuator	STM
Minimum Focusing Distance	0.30m
Optical Image Stabilisation	Up to 4.5 stops (CIPA Standards)
Aperture Blades	7 blades
Filter Size	58mm
Maximum Diameter & Length	Ø69.6 x 58mm
Weight	210g

RF28-70mm f/2L USM	
Lens Construction	19 elements in 13 groups
Diagonal Angle of View	75°00' - 34°00'
Focusing Actuator	Ring-type USM
Minimum Focusing Distance	0.39m
Optical Image Stabilisation	-
Aperture Blades	9 blades
Filter Size	95mm
Maximum Diameter & Length	Ø103.8 x 139.8mm
Weight	1430g

RF24-105mm f/2.8 L IS USM Z	
Lens Construction	23 elements in 18 groups
Diagonal Angle of View	84°- 23° 20'
Focusing Actuator	Dual Nano USM
Minimum Focusing Distance	0.45m
Optical Image Stabilisation	Up to 4 stops (CIPA Standards)
Aperture Blades	11 blades
Filter Size	82mm
Maximum Diameter & Length	Ø88.5 x 199mm
Weight	1330g

RF24-105mm f/4-7.1 IS STM	
Lens Construction	11 elements in 13 groups
Diagonal Angle of View	84°00'-23°20'
Focusing Actuator	STM
Minimum Focusing Distance	0.2m
Optical Image Stabilisation	Up to 5 stops (CIPA Standards)
Aperture Blades	7 blades
Filter Size	67mm
Maximum Diameter & Length	Ø76.6 x 88.8mm
Weight	395g

RF50mm f/1.8 STM	
Lens Construction	6 elements in 5 groups
Diagonal Angle of View	46°00'
Focusing Actuator	STM
Minimum Focusing Distance	0.30m
Optical Image Stabilisation	-
Aperture Blades	7 blades
Filter Size	43mm
Maximum Diameter & Length	Ø69.2 x 40.5mm
Weight	160g

RF50mm f/1.4L VCM	
Lens Construction	14 elements in 11 groups
Diagonal Angle of View	46°00'
Focusing Actuator	Nano USM & VCM
Minimum Focusing Distance	0.40m
Optical Image Stabilisation	-
Aperture Blades	11 blades
Filter Size	67mm + Rear Gelatin Filter Holder
Maximum Diameter & Length	Ø76.5 x 99.3mm
Weight	580g

SPECIFICATIONS

RF LENSES

STANDARD/MEDIUM TELEPHOTO LENSES

RF85mm f/1.4 L VCM

Lens Construction	14 elements in 10 groups
Diagonal Angle of View	28°30'
Focusing Actuator	VCM
Minimum Focusing Distance	0.75m
Optical Image Stabilisation	-
Aperture Blades	11 blades
Filter Size	67mm
Maximum Diameter & Length	Ø76.5 x 99.3mm
Weight	636g

RF85mm f/1.2L USM DS

Lens Construction	13 elements in 9 groups
Diagonal Angle of View	28°30'
Focusing Actuator	Ring-type USM
Minimum Focusing Distance	0.85m
Optical Image Stabilisation	-
Aperture Blades	9 blades
Filter Size	82mm
Maximum Diameter & Length	Ø103.2 x 117.3mm
Weight	1195g

RF85mm f/1.2L USM

Lens Construction	13 elements in 9 groups
Diagonal Angle of View	28°30'
Focusing Actuator	Ring-type USM
Minimum Focusing Distance	0.85m
Optical Image Stabilisation	-
Aperture Blades	9 blades
Filter Size	82mm
Maximum Diameter & Length	Ø103.2 x 117.3mm
Weight	1195g

RF135mm f/1.8L IS USM

Lens Construction	17 elements in 12 groups
Diagonal Angle of View	18°00'
Focusing Actuator	Nano USM
Minimum Focusing Distance	0.7m
Optical Image Stabilisation	Up to 5.5 stops (CIPA Standards)
Aperture Blades	9 blades
Filter Size	82mm
Maximum Diameter & Length	Ø89.2 x 130.3mm
Weight	935g

TELEPHOTO/SUPER TELEPHOTO LENSES

RF24-240mm f/4-6.3 IS USM

Lens Construction	21 elements in 15 groups
Diagonal Angle of View	84°00' - 10°20'
Focusing Actuator	Nano USM
Minimum Focusing Distance	0.50m
Optical Image Stabilisation	Up to 5 stops (CIPA Standards)
Aperture Blades	7 blades
Filter Size	72mm
Maximum Diameter & Length	Ø80.4 x 122.5mm
Weight	750g

RF70-200mm f/2.8L IS USM

Lens Construction	17 elements in 13 groups
Diagonal Angle of View	34°00' - 12°00'
Focusing Actuator	Dual Nano USM
Minimum Focusing Distance	0.70m
Optical Image Stabilisation	Up to 5 stops (CIPA Standards)
Aperture Blades	9 blades
Filter Size	77mm
Maximum Diameter & Length	Ø89.9 x 146mm
Weight	1070g (w/o tripod mount)

RF75-300mm f/4-5.6

Lens Construction	13 elements in 9 groups
Diagonal Angle of View	32°11' - 8°15'
Focusing Actuator	DC Motor
Minimum Focusing Distance	1.5m
Optical Image Stabilisation	-
Aperture Blades	7 blades
Filter Size	58mm
Maximum Diameter & Length	Ø71.2 x 146.1mm
Weight	507g

RF70-200mm f/2.8L VCM (BK/W)

Lens Construction	18 elements in 15 groups
Diagonal Angle of View	34°00' - 12°00'
Focusing Actuator	Dual Nano USM
Minimum Focusing Distance	0.49m
Optical Image Stabilisation	Up to 5.5 stops (CIPA Standards)
Aperture Blades	11 blades
Filter Size	82mm
Maximum Diameter & Length	Ø88.5 x 199mm
Weight	1115g (WH)/1110g (BK) (excl. tripod mount)

RF70-200mm f/4L IS USM

Lens Construction	16 elements in 11 groups
Diagonal Angle of View	34°00' - 12°00'
Focusing Actuator	Dual Nano USM
Minimum Focusing Distance	0.60m
Optical Image Stabilisation	Up to 5 stops (CIPA Standards)
Aperture Blades	9 blades
Filter Size	77mm
Maximum Diameter & Length	Ø83.5 x 119mm
Weight	695g

RF100-300mm f/2.8L IS USM

Lens Construction	23 elements in 18 groups
Diagonal Angle of View	24°00' - 8°15'
Focusing Actuator	Dual Nano USM
Minimum Focusing Distance	1.8m
Optical Image Stabilisation	Up to 5.5 stops (CIPA Standards)
Aperture Blades	9 blades
Filter Size	112mm
Maximum Diameter & Length	Ø128.0 x 323.4mm
Weight	2590g

RF100-400mm f/5-8 IS USM

Lens Construction	12 elements in 9 groups
Diagonal Angle of View	24°00' - 6°10'
Focusing Actuator	Nano USM
Minimum Focusing Distance	0.88m
Optical Image Stabilisation	Up to 5.5 stops (CIPA Standards)
Aperture Blades	9 blades
Filter Size	67mm
Maximum Diameter & Length	Ø79.5 x 164.7mm
Weight	635g

RF100-500mm f/4.5-7.1L IS USM

Lens Construction	20 elements in 14 groups
Diagonal Angle of View	24°00' - 5°00'
Focusing Actuator	Dual Nano USM
Minimum Focusing Distance	0.90m
Optical Image Stabilisation	Up to 5 stops (CIPA Standards)
Aperture Blades	9 blades
Filter Size	77mm
Maximum Diameter & Length	Ø93.8 x 207.6mm
Weight	1370g

RF LENSES

TELEPHOTO/SUPER TELEPHOTO LENSES

RF200-800mm f/6.3-9 IS USM

Lens Construction	17 elements in 11 groups
Diagonal Angle of View	12° - 3° 05'
Focusing Actuator	Nano USM
Minimum Focusing Distance	0.8m
Optical Image Stabilisation	Up to 5.5 stops (CIPA Standards)
Aperture Blades	9 blades
Filter Size	95mm
Maximum Diameter & Length	Ø102.3 x 314.15mm
Weight	2050g

RF800mm f/11 IS STM

Lens Construction	11 elements in 8 groups
Diagonal Angle of View	3°05'
Focusing Actuator	STM
Minimum Focusing Distance	6.00m
Optical Image Stabilisation	Up to 4 stops (CIPA Standards)
Aperture Blades	-
Filter Size	95mm
Maximum Diameter & Length	Ø101.6 x 281.8mm
Weight	1260g

RF600mm f/4L IS USM

Lens Construction	17 elements in 13 groups
Diagonal Angle of View	4°10'
Focusing Actuator	Ring Type USM
Minimum Focusing Distance	4.20m
Optical Image Stabilisation	Up to 5.5 stops (CIPA Standards)
Aperture Blades	9 blades
Filter Size	52mm Drop-in
Maximum Diameter & Length	Ø168 x 472mm
Weight	3090g

RF1200mm f/8L IS USM

Lens Construction	26 elements in 18 groups
Diagonal Angle of View	2°5'
Focusing Actuator	Ring Type USM
Minimum Focusing Distance	4.3m
Optical Image Stabilisation	Up to 4 stops (CIPA Standards)
Aperture Blades	9 blades
Filter Size	52mm Drop-in
Maximum Diameter & Length	Ø168 x 537mm
Weight	3340g

RF35mm f/1.8 Macro IS STM

Lens Construction	11 elements in 9 groups
Diagonal Angle of View	63°00'
Focusing Actuator	STM
Minimum Focusing Distance	0.17m
Optical Image Stabilisation	Up to 5 stops (CIPA Standards)
Aperture Blades	9 blades
Filter Size	52mm
Maximum Diameter & Length	Ø74.4 x 62.8mm
Weight	305g

RF85mm f/2 Macro IS STM

Lens Construction	12 elements in 11 groups
Diagonal Angle of View	28°30'
Focusing Actuator	STM
Minimum Focusing Distance	0.35m
Optical Image Stabilisation	Up to 5 stops (CIPA Standards)
Aperture Blades	9 blades
Filter Size	67mm
Maximum Diameter & Length	Ø78 x 90.5mm
Weight	500g

RF600mm f/11 IS STM

Lens Construction	10 elements in 7 groups
Diagonal Angle of View	4°10'
Focusing Actuator	STM
Minimum Focusing Distance	4.50m
Optical Image Stabilisation	Up to 5 stops (CIPA Standards)
Aperture Blades	-
Filter Size	82mm
Maximum Diameter & Length	Ø93 x 199.5mm
Weight	930g

RF400mm f/2.8L IS USM

Lens Construction	17 elements in 13 groups
Diagonal Angle of View	6°10'
Focusing Actuator	Ring Type USM
Minimum Focusing Distance	2.50m
Optical Image Stabilisation	Up to 5.5 stops (CIPA Standards)
Aperture Blades	9 blades
Filter Size	52mm Drop-in
Maximum Diameter & Length	Ø163 x 367mm
Weight	2890g

RF800mm f/5.6L IS USM

Lens Construction	26 elements in 18 groups
Diagonal Angle of View	3°5'
Focusing Actuator	Ring Type USM
Minimum Focusing Distance	2.6m
Optical Image Stabilisation	Up to 4.5 stops (CIPA Standards)
Aperture Blades	9 blades
Filter Size	52mm Drop-in
Maximum Diameter & Length	Ø163 x 432mm
Weight	3140g

MACRO LENSES

RF24mm f/1.8 Macro IS STM

Lens Construction	11 elements in 9 groups
Diagonal Angle of View	84°00'
Focusing Actuator	STM
Minimum Focusing Distance	0.14m
Optical Image Stabilisation	Up to 5 stops (CIPA Standards)
Aperture Blades	9 blades
Filter Size	52mm
Maximum Diameter & Length	Ø74.4 x 63.1mm
Weight	270g

RF100mm f/2.8L MACRO IS USM

Lens Construction	17 elements in 13 groups
Diagonal Angle of View	24°00'
Focusing Actuator	Dual Nano USM
Minimum Focusing Distance	0.26m
Optical Image Stabilisation	Up to 5 stops (CIPA Standards)
Aperture Blades	9 blades
Filter Size	67mm
Maximum Diameter & Length	Ø81.5 x 148mm
Weight	730g

RF-S LENSES

RF-S10-18mm f/4.5-6.3 IS STM

Lens Construction	12 elements in 10 groups
Diagonal Angle of View	107° 30' - 74° 20'
Focusing Actuator	Screw lead type STM
Minimum Focusing Distance	0.08m
Optical Image Stabilisation	Up to 4 stops (CIPA Standards)
Aperture Blades	7 blades
Filter Size	49mm
Maximum Diameter & Length	Ø69 x 44.9mm
Weight	150g

SPECIFICATIONS

RF LENSES

RF-S LENSES

RF-S 14-30mm f/4-6.3 IS STM PZ

Lens Construction	10 elements in 9 groups
Diagonal Angle of View	88°30' - 48°50'
Focusing Actuator	STM
Minimum Focusing Distance	0.15m
Optical Image Stabilisation	Up to 5 stops (CIPA Standards)
Aperture Blades	7 blades
Filter Size	58mm
Maximum Diameter & Length	Ø69.6 x 62mm
Weight	181g

RF-S18-45mm f/4.5-6.3 IS STM

Lens Construction	7 elements in 7 groups
Diagonal Angle of View	74° 20' - 33° 40'
Focusing Actuator	STM
Minimum Focusing Distance	0.2m
Optical Image Stabilisation	Up to 4 stops (CIPA Standards)
Aperture Blades	7 blades
Filter Size	49mm
Maximum Diameter & Length	Ø69 x 44.3mm
Weight	130g

RF-S55-210mm f/5-7.1 IS STM

Lens Construction	11 elements in 8 groups
Diagonal Angle of View	27°50' - 7°20'
Focusing Actuator	STM
Minimum Focusing Distance	0.73m
Optical Image Stabilisation	Up to 4.5 stops (CIPA Standards)
Aperture Blades	7 blades
Filter Size	55mm
Maximum Diameter & Length	Ø69 x 92.9mm
Weight	270g

RF-S18-150mm f/3.5-6.3 IS STM

Lens Construction	17 elements in 13 groups
Diagonal Angle of View	74° 20' - 10° 25'
Focusing Actuator	STM
Minimum Focusing Distance	0.17m
Optical Image Stabilisation	Up to 4.5 stops (CIPA Standards)
Aperture Blades	7 blades
Filter Size	55mm
Maximum Diameter & Length	Ø69 x 84.5mm
Weight	310g

VR LENSES

RF5.2mm f/2.8L DUAL FISHEYE

Lens Construction	11 elements in 8 groups
Diagonal Angle of View	144°
Focusing Actuator	STM
Minimum Focusing Distance	0.2m
Aperture Blades [each lens]	7 blades
Filter Size	Rear Gelatin Filter Holder Support Only
Dimensions [Width x Height x Length]	112.1 x 83.7 x 54.6mm
Weight	290g

RF-S 3.9mm f/3.5 STM DUAL FISHEYE

Lens Construction	11 elements in 8 groups
Diagonal Angle of View	144°
Focusing Actuator	STM
Minimum Focusing Distance	0.2m
Aperture Blades [each lens]	7 blades
Filter Size	Rear Gelatin Filter Holder Support Only
Dimensions [Width x Height x Length]	112.1 x 83.7 x 54.6mm
Weight	290g

RF-S 7.8mm f/4 STM DUAL

Lens Construction	11 elements in 8 groups
Diagonal Angle of View	144°
Focusing Actuator	STM
Minimum Focusing Distance	0.2m
Aperture Blades [each lens]	7 blades
Filter Size	Rear Gelatin Filter Holder Support Only
Dimensions [Width x Height x Length]	112.1 x 83.7 x 54.6mm
Weight	290g

RF EXTENDERS

EXTENDER RF1.4x


Lens Construction	7 elements in 4 groups
Maximum Diameter & Length	Ø71.2 x 20.3mm
Weight	225g

EXTENDER RF2x

Lens Construction	9 elements in 5 groups
Maximum Diameter & Length	Ø71.2 x 39.3mm
Weight	340g



RF7-14mm f/2.8-3.5L
Fisheye STM

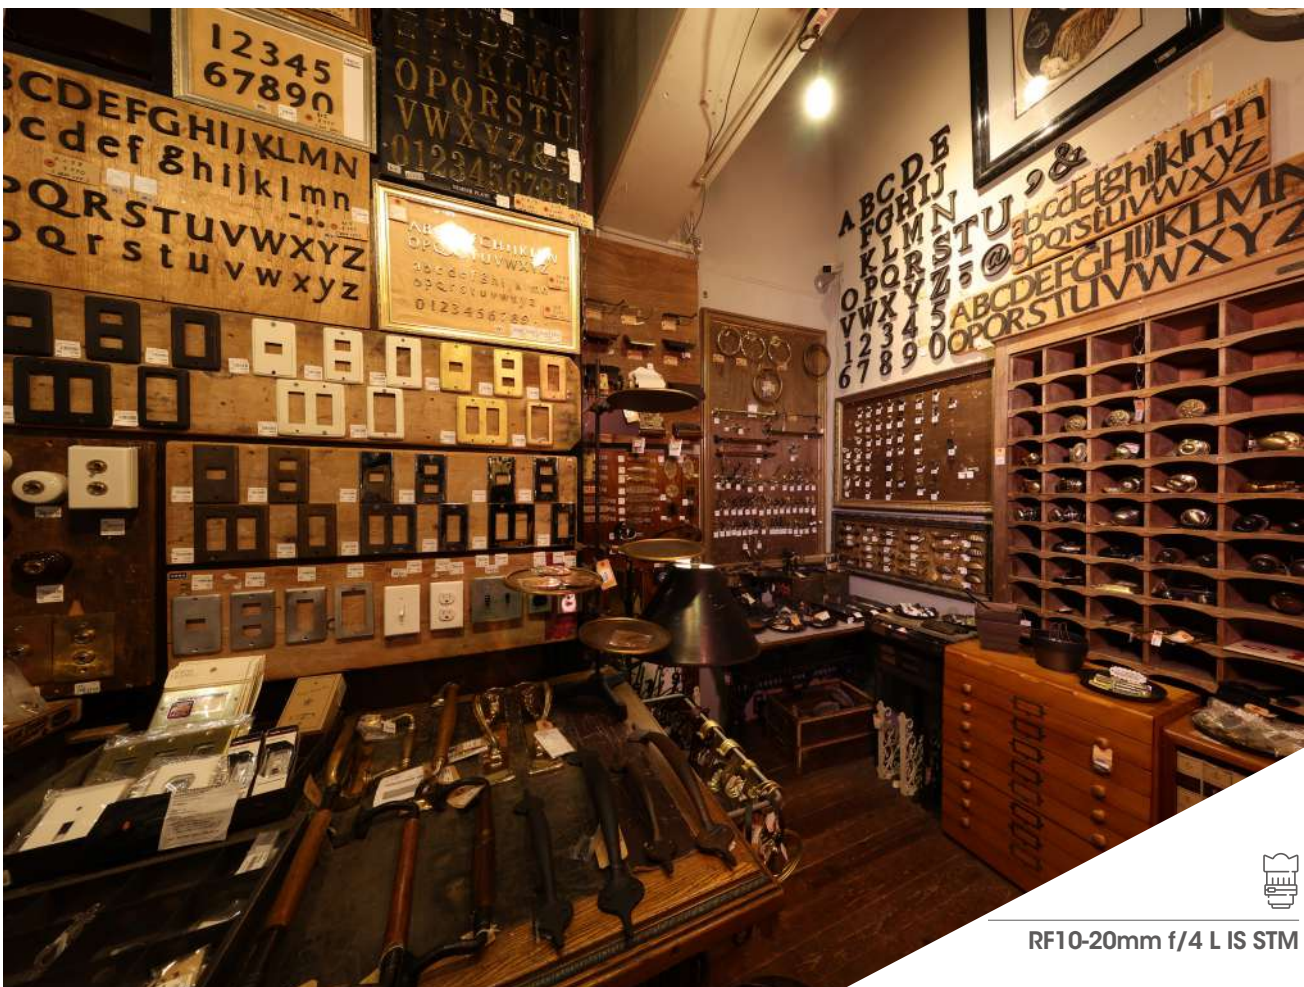


RF10-20mm f/4 L IS STM




RF14-35mm f/4L IS USM



RF16-28mm f/2.8 IS STM

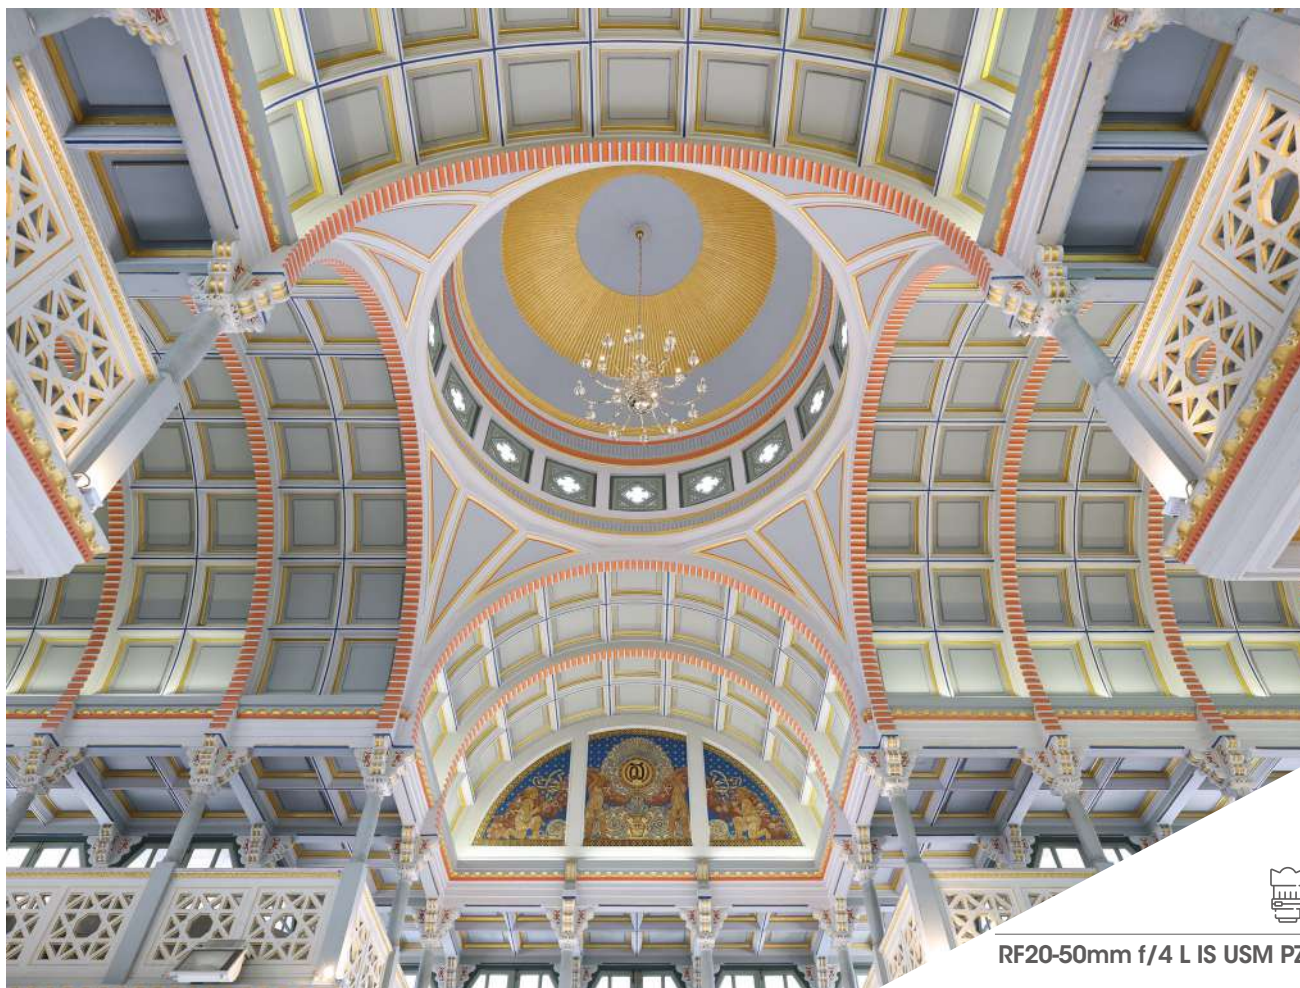

RF20-50mm f/4 L IS USM PZ

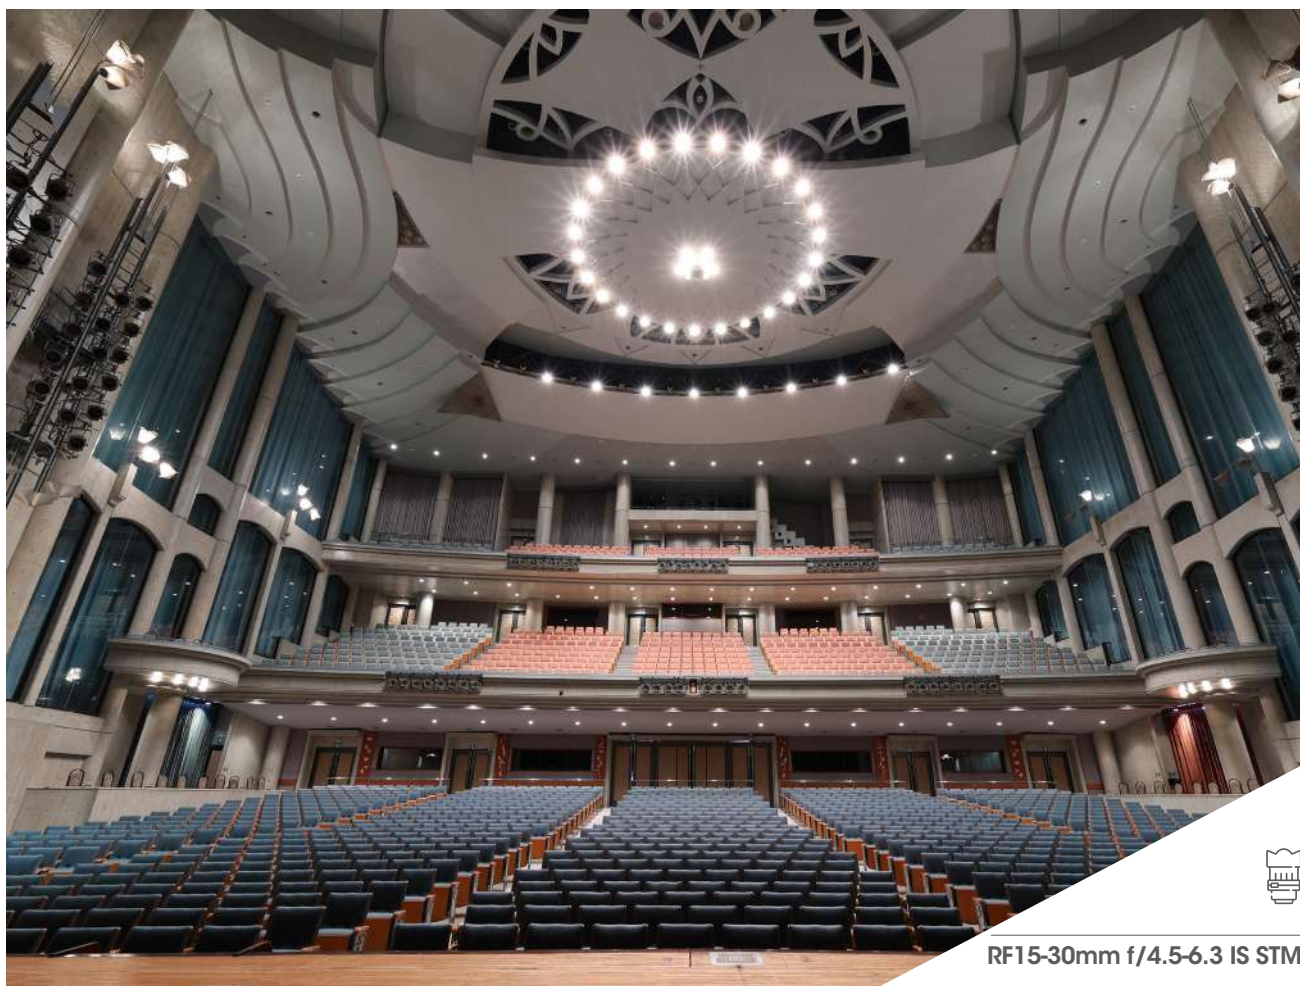

RF15-30mm f/4.5-6.3 IS STM



RF20mm f/1.4L VCM



RF16mm f/2.8 STM



RF24mm f/1.4L VCM



RF28mm f/2.8 STM



RF35mm f/1.4L VCM
Photo Credit: Abhishek Khanna



RF35mm f/1.8 Macro IS STM
Photo Credit: Nitin Arora



RF24-50mm f/4.5-6.3 IS STM



RF28-70mm f/2L USM
Photo Credit: Anega Bawa



RF28-70mm f/2.8 IS STM



RF24-105mm f/4L IS USM
Photo Credit: Abhishek Khanna



RF24-105mm f/2.8 L IS USM Z



RF24-105mm f/4-7.1 IS STM



RF45mm f/1.2 STM



RF50mm f/1.8 STM



RF50mm f/1.4L VCM



RF85mm f/2 Macro IS STM



RF85mm f/1.2L USM
Photo Credit: Reji Bhaskar



RF85mm f/1.2L USM DS
Photo Credit: Anega Bawa



RF85mm f/1.4 LVCM



RF100mm f/2.8L MACRO IS USM
Photo Credit: Ravi Dhingra




RF85mm f/1.2L USM
Photo Credit: Reji Bhaskar



RF24-240mm f/4-6.3 IS USM
Photo Credit: Ravi Dhingra



RF70-200mm f/4L IS USM

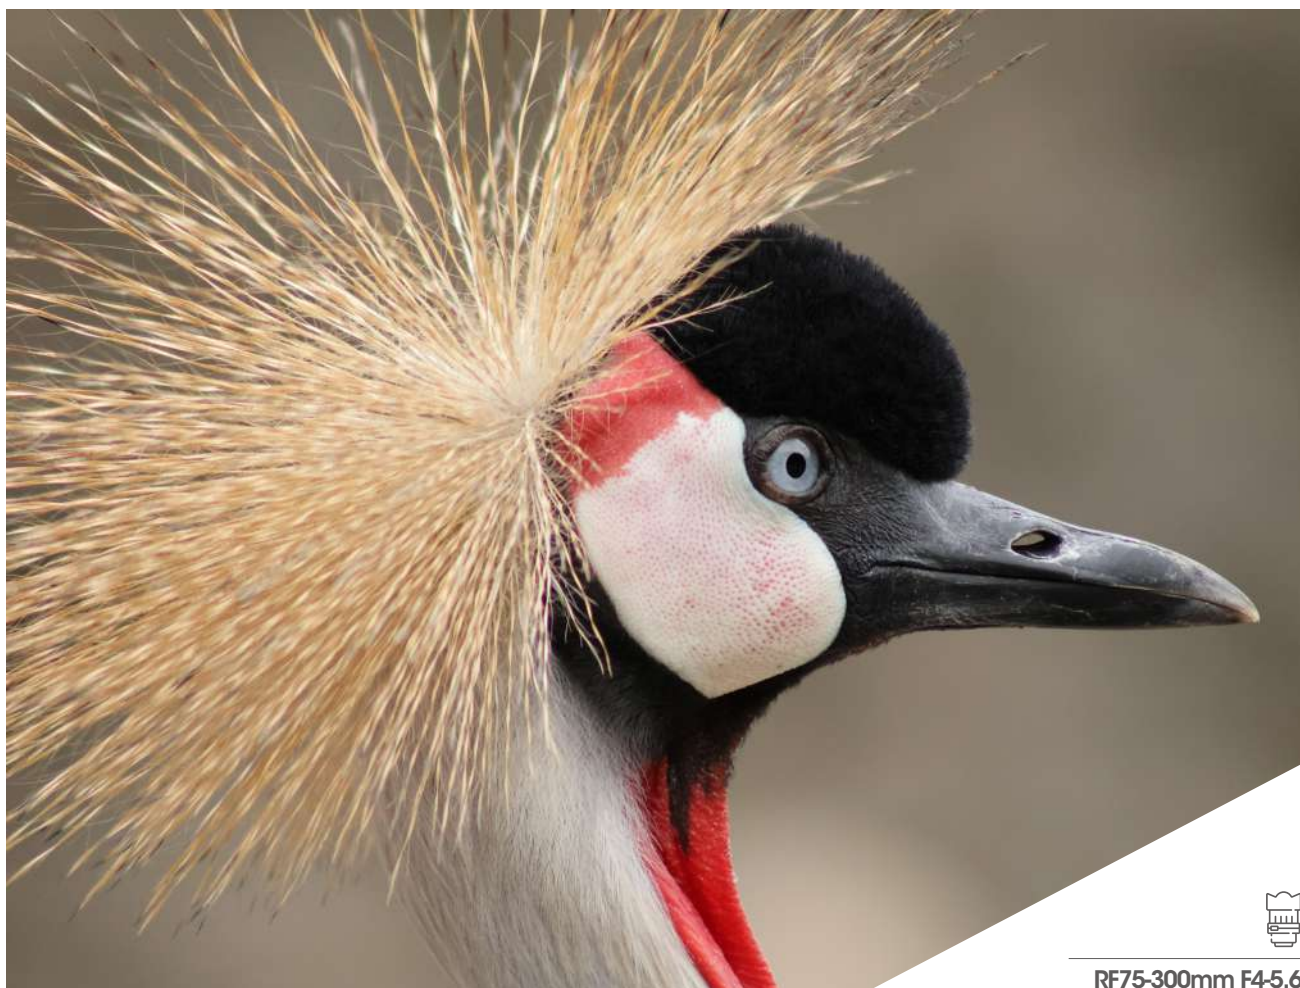

RF75-300mm F4-5.6



RF70-200mm f/2.8L IS USM
Photo Credit: Yogi Trivedi




RF100-300mm f/2.8L IS USM



RF100-400mm f/5.6-8 IS USM



RF100-500mm f/4.5-7.1L IS
USM + Extender RF 2x
Photo Credit: Tejas Soni

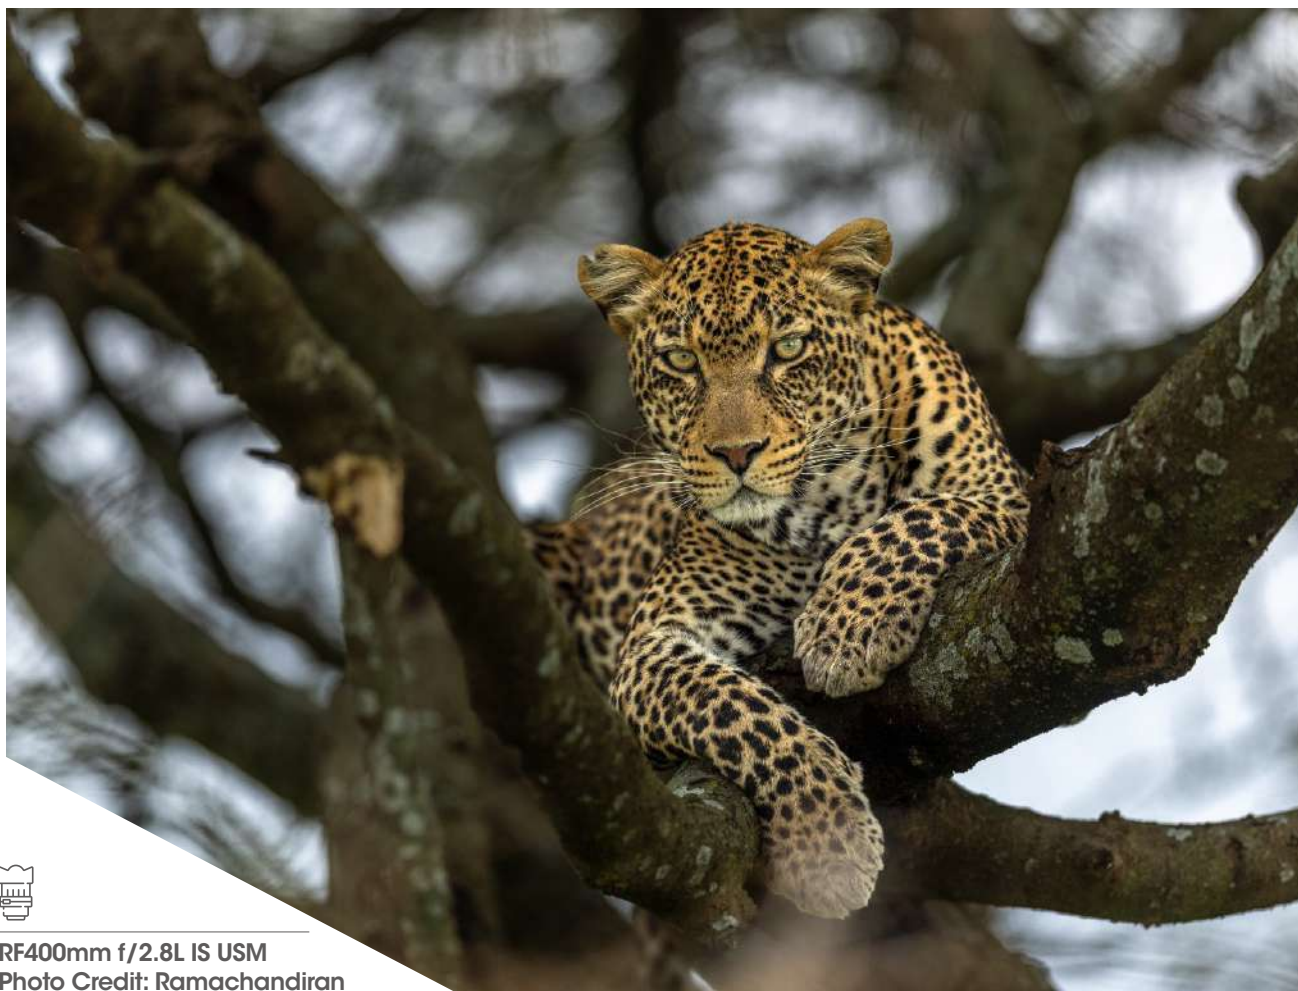

RF400mm f/2.8L IS USM

Photo Credit: Ramachandiran
Govindaraj



RF600mm f/4L IS USM

Photo Credit: Phillip Ross



RF-S18-150mm f3.5-6.3 IS STM



RF-S 14-30mm F4-6.3 IS STM PZ



RF600mm f/11 IS STM



RF-S10-18mm f/4.5-6.3 IS STM



RF-S18-45mm f/4.5-6.3 IS STM



RF-S55-210mm f/5-7.1 IS STM
Photo Credit: Dr. Caesar Sengupta



Delighting You Always

Canon India Pvt. Ltd.

Corporate Office:
7th Floor, Tower B, Building No. 5,
DLF Cyber City, Gurugram – 122002


For Canon Camera Service / Collection Centres details,
Call: Numbers: 1860 180 3366 or 1800 208 3366
Visit: <http://bit.ly/canonservicenetwork>

Canon Master Service Centres:
Noida, Kolkata, Mumbai, Bengaluru, Chennai and Kochi

Canon Authorised Service Franchisee:
Ahmedabad, Bhubaneswar, Chennai, Guwahati,
Hyderabad, Indore, Ludhiana and Pune

For other details, visit: in.canon

Follow [canoncameras.in](https://www.instagram.com/canoncameras.in) on Instagram, Facebook,
Canon cameras India on youtube



Dealer's Stamp

For exact product features and its uses terms and conditions visit in.canon at the respective product page. All images and effects are simulated. Actual images may vary. Models and specifications are subject to change without prior notification. Prices mentioned for all products are MRP (inclusive of all taxes). Errors and omissions expected. Wi-Fi is a trademark of respective company. Canon is a registered trademark of Canon Inc. Offer valid till stocks last. Wi-Fi support varies by region and device type. Uploading of still images/videos to any website directly from Wi-Fi camera is subject to registration on Canon Image Gateway. Transfer of still images/videos to iPhone/iPad/Android devices from Wi-Fi camera is subject to download of free app, Canon Camera Connect. Both NFC and Wi-Fi can be used to shoot remotely from an Android device, or even upload directly to social networking sites. Manual explains file transfer between camera and smartphone. Offer period at Canon India's discretion. T&C apply.