


imagePROGRAF
TM-5510 | 5515 & TM-5610 | 5615

Canon
Delighting You Always


Reliable Productivity for Every Print

#SeamlessandFlawless



Bring every idea to life with vibrant colour, sharp detail, and faster processing. From precise CAD drawings to vivid photos and standout posters, the **imagePROGRAF TM-5515, TM-5510, TM-5615 and TM-5610** large format printers deliver the seamless, swift, and reliable performance businesses need to create with confidence.

THE TM SERIES ADVANTAGE



Automatic Paper Detection

Once the media is fed into the printer, the imagePROGRAF TM Series will automatically determine the media type, length, and width, which will be shown on the display panel.



User-Friendly Design

Built for efficiency and comfort with a flat-body design for easy media loading, full-frontal operation, and adjustable user interface screen.



5-Color LUCIA TD Pigment Ink System

Updated Matte Black ink helps to produce crisper lines, sharper text, and vivid posters on plain paper when compared to the previous TM series.



imagePROGRAF TM-5610


Designed for Efficient Workspaces

Designed for compact workspaces, the printers combine a small footprint with a flat top design, making roll paper replacement and temporary placement of output prints more convenient.

Complete front-access operation further simplifies paper loading, ink replacement and output retrieval, while a new desktop basket helps keep prints neatly organised in desktop environments.



Ability to view the status of the printer and consumables at one glance with the **4.3" touch screen panel**.

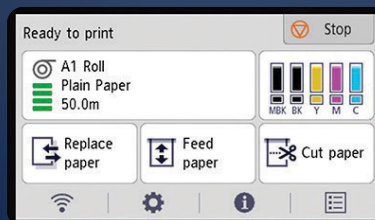

Sub Ink Tank System

The gravity-fed ink tanks allow for virtually every drop of ink in the tank to be used. Plus, you can change inks on the fly while the printer is printing.





Delivers Good Quality Prints Even on Plain Paper

The latest colour processing enhances colour mapping to make printing of vivid, high contrast posters on normal plain paper possible.

Print True Borderless

Print stunning borderless posters on any roll paper size, with no trimming or post-processing required.

STREAMLINE FOR PRODUCTIVITY

Streamline how you manage workflows with convenient and intuitive software applications.

Free Layout Plus

Documents can be resized easily with Free Layout Plus, which allows files to be dragged and dropped into the software for **easy document resizing to specific paper layouts**.

Accounting Manager

Monitor and **keep track of print usage** with ease using the Accounting Manager application.

PosterArtist

Design vibrant posters for your needs with minimal effort using the PosterArtist application.




Check it out at <https://posterartist.canon.>

Direct Print Plus

The Direct Print Plus feature allows you to print **HP-GL2, TIFF, JPEG and PDF files** in batches with custom templates with minimal effort.



Drag & Drop

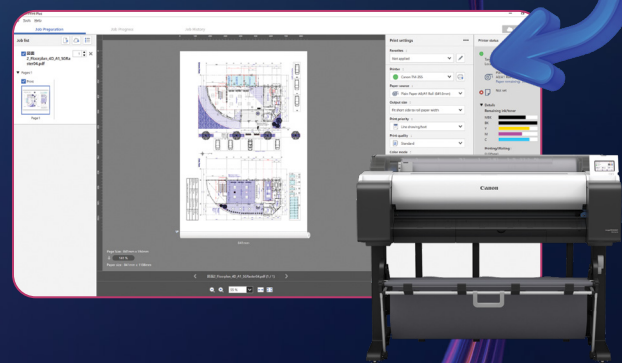

Specifications

MODEL			TM-5510 (24")	TM-5610 (36")
Ink Type			Pigment inks / 5 colour (MBK / BK / C / M / Y)	
Max. Print Resolution			2,400 x 1,200 dpi	
Unit Dimensions (W x D x H)	Main Unit		978 x 720 x 421 mm Weight: 42 kg*1	1,285 x 720 x 421 mm Weight: 50 kg*1
	Main Unit + Stand + Loading Basket		978 x 885 x 1,041 mm (Basket Opened) 978 x 756 x 1,041 mm (Basket Closed) Weight: 55 kg*1 (SD-26)	1,285 x 885 x 1,041 mm (Basket Opened) 1,285 x 756 x 1,041 mm (Basket Closed) Weight: 65 kg*1 (SD-35)
Package Dimensions (W x D x H)	Printer (Main Unit + Pallet)		1,152 x 913 x 650 mm Weight: 74 kg	—
	Stand + Loading Basket		1,058 x 826 x 270 mm Weight: 22 kg	—
	Desktop Basket (BU-07)		798 x 301 x 111 mm Weight: 2 kg	—
	Printer (Main Unit + Stand + Loading Basket + Pallet)		1,152 x 913 x 914 mm Weight: 97 kg	1,462 x 1,122 x 769 mm Weight: 112 kg
Power Supply	Input Power		AC 100 - 240 V (50 - 60 Hz)	
	Power Consumption*2		Approx. 62 W	Approx. 65 W
	Sleep Mode*2		Approx. 1.6 W	
	Power Off		Approx. 0.06 W	
Recommended Environment			Temperature: 15 - 30°C Humidity: 10 - 80% RH (no dew condensation)	
Acoustic Noise*3	Acoustic Pressure	Operation	Approx. 41 dB [2]	
		Standby	35 dB(A) or less	
	Acoustic Power	Operation	Approx. 6.2 Bels [2]	
Line Accuracy*4			± 0.1%	
Standard Memory			2 GB	
Storage			—	
Printer Languages			SGRaster (Swift Graphic Raster)	
			HP-GL/2	
			HP-RTL	
			JPEG	
			CALS G4	
Apple AirPrint			Supported (macOS / iOS / iPadOS)	
Operation Panel	Display		LCD (4.3 inch / 10.9 cm TFT colour)	
Interface	USB B Port	Type	Built-in (Hi-Speed USB)	
		Mode	Full Speed (12 Mbit/sec), High Speed (480 Mbit/sec), Bulk Transfer	
		Connector Type	Series B (4 pins) [3]	
	USB A Port		— [3]	
	Gigabit Ethernet	Type	Built-in	
		Standard	IEEE802.3ab (1000BASE-T) / IEEE802.3u (100BASE-TX) / IEEE802.3 (10BASE-T)	
		Protocol	SNMP (Canon-MIB), HTTP, TCP/IP (IPv4 / IPv6), FTP	
	Wireless LAN	Standard	IEEE802.11n / IEEE802.11g / IEEE802.11b	
		Security	WPA-PSK (TKIP/AES), WPA2-PSK (TKIP/AES), WPA3-SAE (AES) WPA-EAP (AES)*5, WPA2-EAP (AES)*5, WPA3-EAP (AES)*5	
	PRINT HEAD			
Model			PF-06	
Nozzles Per Chip			15,360 nozzles (MBK: 5,120 nozzles, Other Colours: 2,560 nozzles each)	

CANON INDIA PVT. LTD.

7th Floor, Tower B, Building #5, DLF Epitome Building, DLF Phase III, Gurugram-122002
Ph.: 0124-4160000 | Fax: 0124-4160011 | Web: in.canon

DEALER'S STAMP	This document is for information purposes only. The contents are subject to change without notice. Product options, name and availability may vary by regions. We expressly disclaim any liability or contractual obligations with respect to this document. Brands and product names are trademarks and/or registered trademarks of their respective owners.
----------------	---

 Canon India complies with the E-Waste (Management) Rules, 2022 and its amendments.

Please return end-of-life product for environmentally safe disposal. For details visit www.canon.co.in/recycle. This document is for information purpose only. The contents are subject to change without notice. Product options, name and availability may vary by regions. We expressly disclaim any liability or contractual obligations with respect to this document. Brands and products names are trademarks and/or registered trademarks of their respective owners.

Warnings: Unauthorized recording of copyrighted materials may infringe on the rights of copyright owners and be contrary to copyright laws.

E-Waste Rules:
Canon India complies with the E-Waste (Management) Rules, 2022 and its amendments. This product is in accordance with the rule 16 pertaining to the Reduction in the use of hazardous substances (ROHS). Once this product reaches to end of life, this product should not be disposed of with your regular household waste.
For more information, please visit: <https://in.canon/en/consumer/web/e-waste> or write to us at cipl.ewaste@canon.co.in



MEDIA HANDLING			TM-5510 (24")	TM-5610 (36")
Media Feed & Output	Roll Paper		One roll, upper-loading, front output	
	Cut Sheet		Upper-loading, front output	
Media Thickness	Roll Paper		0.07 ~ 0.8 mm	
	Cut Sheet			
Maximum Outside Diameter of Roll Paper			150 mm or less	
Media Core Size	Roll Core Internal Diameter		2" / 3"6 [5]	
Media Width	Roll Paper			
	Cut Sheet		203.2 ~ 610 mm	203.2 ~ 917 mm
Min. Printable Paper Length	Roll Paper		203.2 mm	
	Cut Sheet		279.4 mm	
Max. Printable Paper Length	Roll Paper		18 m*7	
	Cut Sheet		1.6 m	
Margins (Top, Bottom, Sides)	Recommended Area	Roll Paper	20 mm, 3 mm, 3 mm	
		Cut Sheet	20 mm, 20 mm, 3 mm With Apple AirPrint: 20 mm, 31 mm, 3 mm	
	Printable Area	Roll Paper	3 mm, 3 mm, 3 mm	
		Roll Paper (Borderless Print)	0 mm, 0 mm, 0 mm	
		Cut Sheet	3 mm, 20 mm, 3 mm With Apple AirPrint: 3 mm, 12.7 mm, 3 mm	
INK TANK				
Colours		Pigment 5 colours (MBK / BK / C / M / Y)		
Capacity	Sales Use		130 ml / 300 ml [4]	
	Starter Use		130 ml (MBK) / 90 ml (BK / C / M / Y)	
OPTIONAL ACCESSORIES				
Stand Basket (Loading Basket)		SD-26	SD-35	
Desktop Basket		BU-07	—	
2/3" Roll Holder		RH2-28	RH2-35	
IC Card Reader Holder		RA-02		
CONSUMABLES				
Ink Tank	Matte Black (MBK)		PFI-8323 (300 ml) / PFI-8123 (130 ml)	
	Magenta (M)		PFI-8321 (300 ml) / PFI-8121 (130 ml)	
	Black (BK) / Cyan (C) / Yellow (Y)		PFI-8320 (300 ml) / PFI-8120 (130 ml)	
Print Head		PF-06		
Cutter Blade		CT-08		
Maintenance Cartridge		MC-31		
ADDITIONAL FEATURES			TM-5515 (24")	TM-5615 (36")
Power Supply	Input Power		AC 100 - 240 V (50 - 60 Hz)	
	Power Consumption*2		Approx. 64 W	Approx. 69 W
	Sleep Mode*2		Approx. 1.6 W	
	Power Off		Approx. 0.06 W	
Standard Memory		128 GB (Physical memory 2 GB)		
Storage		256 GB		
Interface	USB A Port		USB Memory (Direct Print) [3]	

All other specifications are the same as TM-5510 / TM-5610.
Specifications are subject to change without notice.
*1 Includes Roll Holder Set, excludes ink and print head.
*2 Using wired LAN.
*3 Measured based on ISO7779 standards, using 24-inch (TM-5510 / TM-5515) or 36-inch (TM-5610 / TM-5615) Standard Plain Paper2 (Standard Plain Paper, Standard mode, Line Drawing/Text mode).
*4 User adjustments necessary. Printing environment and media must match those used for the adjustments.
*5 Supports IEEE802.1X (EAP-TLS/EAP-TTLS/PEAP).
*6 3" core adaptor is NOT in the box. Available as a service part.
*7 Varies according to the OS and application.

Part Code : 9700W294